


PRESSURE CONTROLS


Pressure Adjustment Options

“A” — 1/4-in. Hex Allen Head

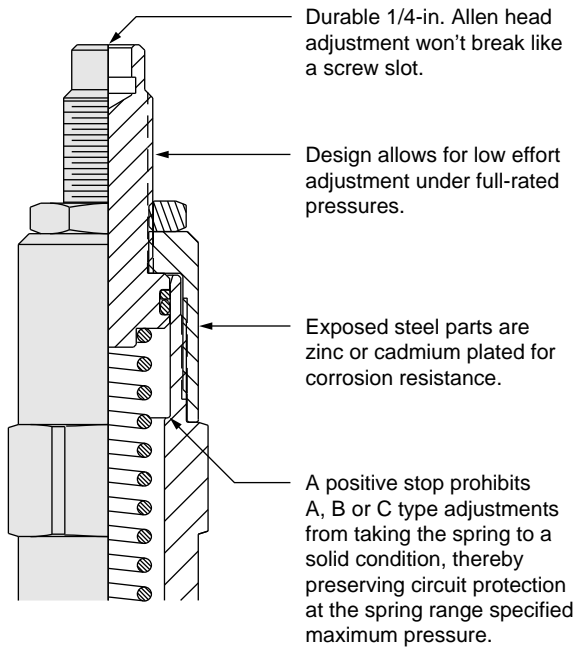


“A-Alt.” — 1/4-in. Hex Allen Head


For valve models RVD50-20 and CB10-30 only.

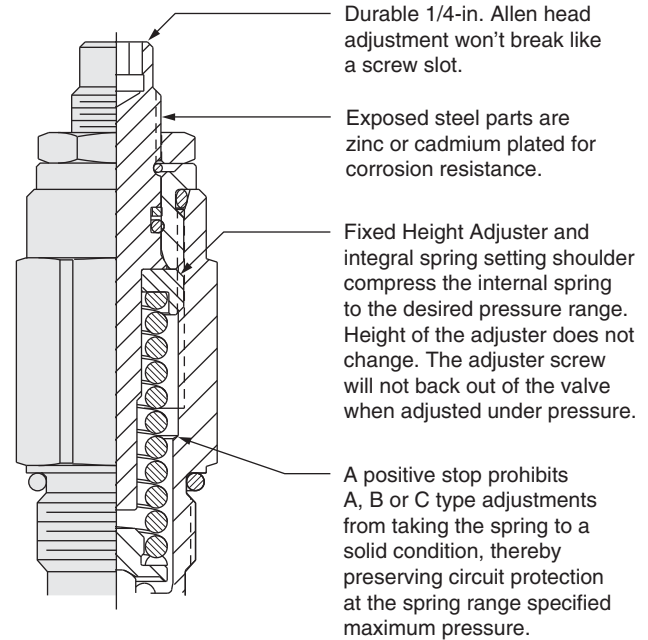

“B” — 1 1/2-in. Diameter Aluminum Knob

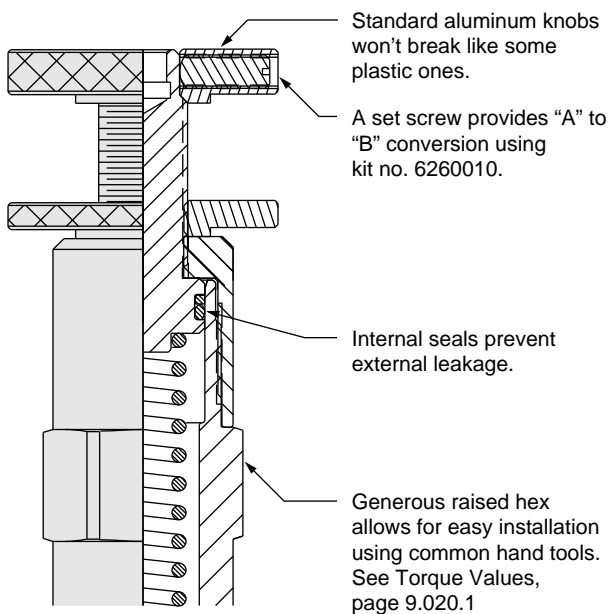


“C” — 1/4-in. Hex with Cover Cap

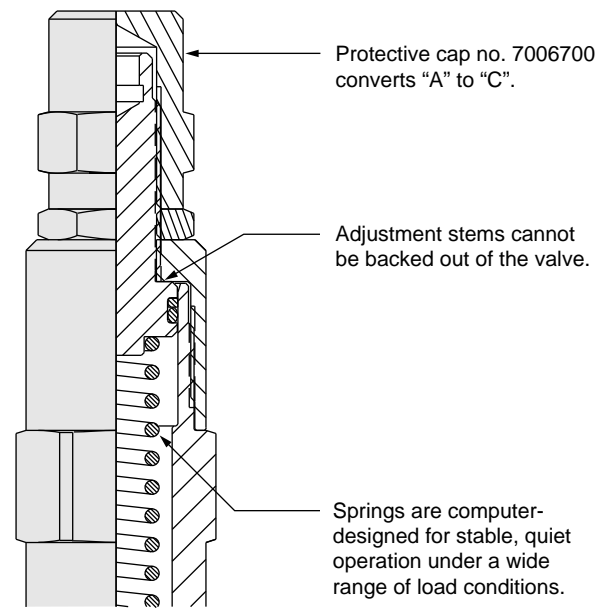


Pressure Adjustment Options (cont'd)


“F” — Factory Preset, Non-Adjustable

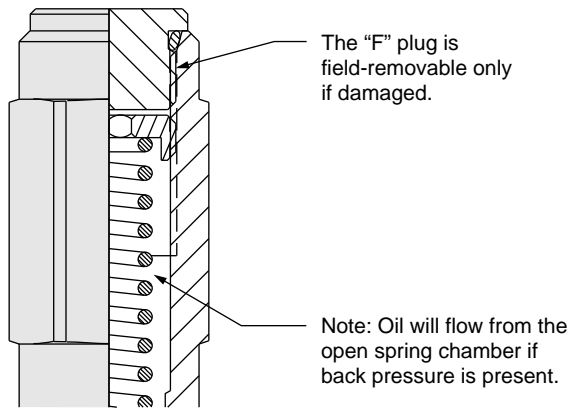

“H” — Factory Preset, Adjustable

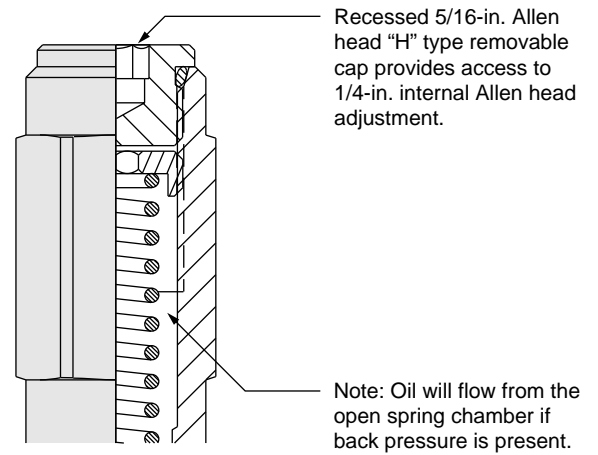

“L” — Option “C” with Lockwire Holes

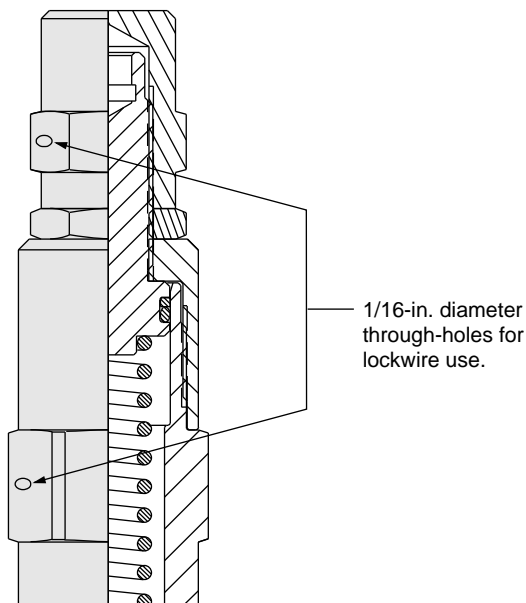

Adjusting Without a Gauge

Percent of Spring Pressure Range Achieved at 1 Revolution:

Valve Size	Adj. Type A, B, C, L
-08	12.5%
-10	10%
-12	10%