



SV08-31 Spool, 3-Way

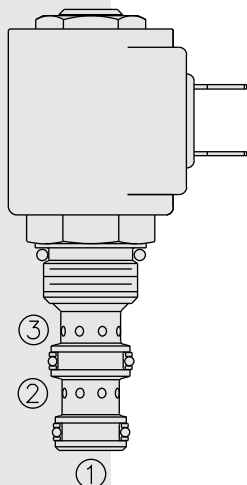


SYMBOLS

USAS/ISO:



PERFORMANCE (Cartridge Only)

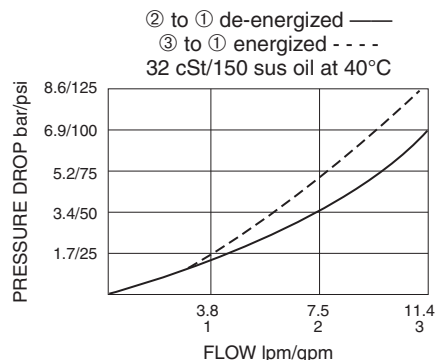

DESCRIPTION

A solenoid-operated, three-way, direct-acting, spool-type, screw-in hydraulic cartridge valve.

OPERATION

When de-energized, the **SV08-31** allows flow from ② to ①, while blocking flow at ③. When energized, the valve's spool shifts to open from ① to ③, while blocking at ②. While port ① may be fully pressurized, it is not intended to be used as the inlet.

Operation of Manual Override Option: To override, push button in and twist counterclockwise 180°. The internal spring will push the button out. In this position, the valve may be only partially shifted. To assure full override shift, pull the button out to its fullest extension and hold it in this position.

To return to normal valve function, push button in, twist clockwise 180° and release. Override will be detented in this position.

FEATURES

- Continuous-duty rated solenoid.
- Hardened precision spool and cage for long life.
- Optional coil voltages and terminations.
- Efficient wet-armature construction.
- Cartridges are voltage interchangeable.
- All ports may be fully pressurized.
- Manual override option.
- Optional waterproof E-Coils rated up to IP69K.
- Unitized molded coil design.
- Compact size.

RATINGS

Operating Pressure: 207 bar (3000 psi)

Flow: See Performance Chart; Note: Under certain operating conditions this valve may be rated for higher flow. Consult factory.

Internal Leakage: 82 cc/minute (5 cu. in./minute) max. at 207 bar (3000 psi)

Temperature: -40° to 120°C with standard Buna seals;
 -26°C to 204°C with Fluorocarbon seals; -54° to 107°C with Polyurethane seals

Coil Duty Rating: Continuous from 85% to 115% of nominal voltage

Response Time: First indication of change of state with 100% voltage supplied at 80% of nominal flow rating: Energized: 30 msec.; De-energized: 25 msec.

Initial Coil Current Draw at 20°C: Standard Coil: 1.2 amps at 12 VDC;
 0.13 amps at 115 VAC (full wave rectified).
 E-Coil: 1.4 amps at 12 VDC; 0.7 amps at 24 VDC

Minimum Pull-in Voltage: 85% of nominal at 207 bar (3000 psi)

Filtration: See page 9.010.1

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus); See Temperature and Oil Viscosity, page 9.060.1

Installation: No restrictions; See page 9.020.1

Cavity: VC08-3; See page 9.108.1


Cavity Tool: CT08-3XX; See page 8.600.1

Seal Kit: SK08-3X-MM; See page 8.650.1

Coil Nut: Part No. 7004400;

For E-coils manufactured prior to 1-1-04, see page 3.400.1 for coil nut info.

DIMENSIONS

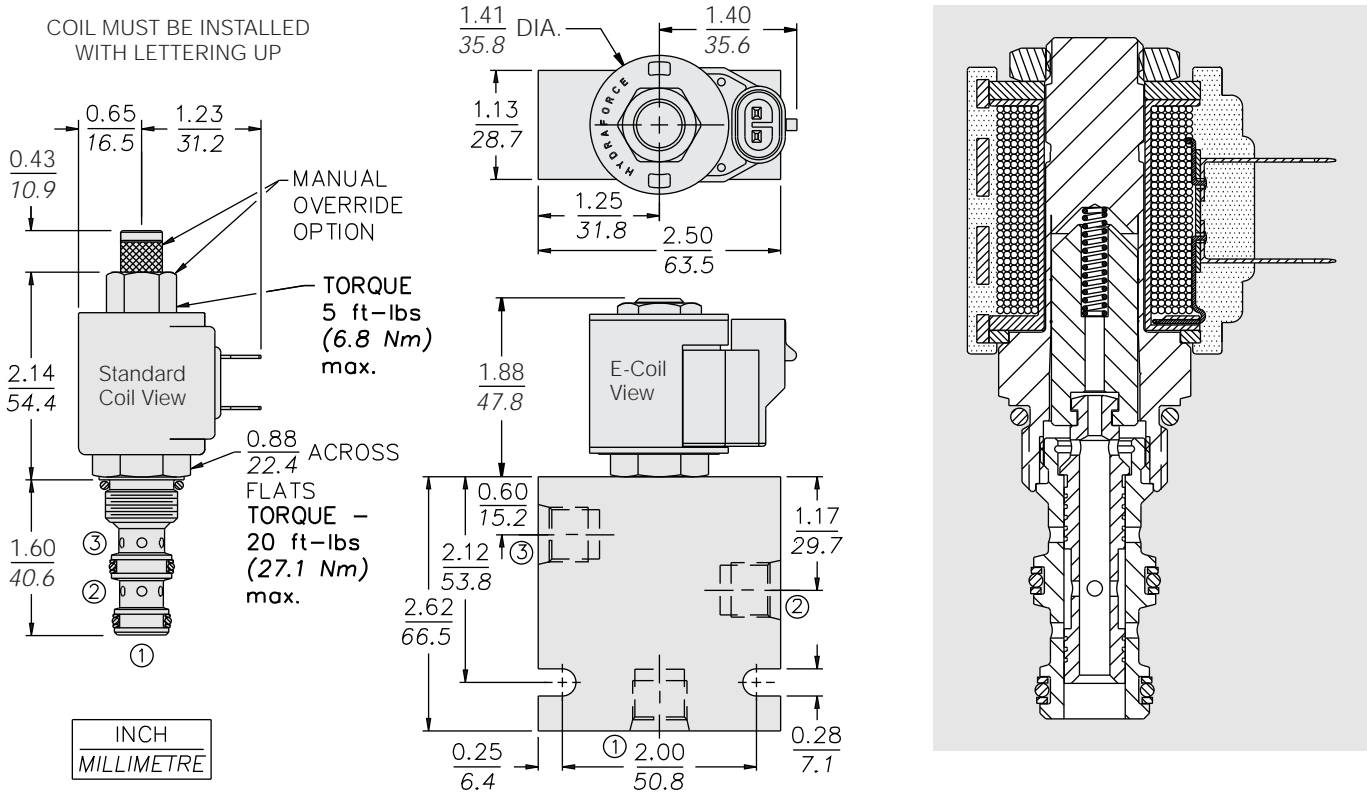

MATERIALS

Cartridge: Weight: 0.13 kg. (0.28 lbs.); Steel with hardened work surfaces. Zinc-plated exposed surfaces; Buna N O-rings and back-ups standard.

Standard Ported Body: Weight: 0.27 kg. (0.60 lbs.); Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi); Ductile iron bodies available; dimensions may differ. See page 8.008.1.

Standard Coil: Weight: 0.11 kg. (0.25 lbs.); Unitized thermoplastic encapsulated, Class H high temperature magnetwire. See page 3.200.1.

E-Coil: Weight: 0.14 kg. (0.3 lbs.); Perfect wound, fully encapsulated with rugged external metal shell; Rated up to IP69K with integral connectors.

See page 3.400.1 for all E-Coil retrofit applications.

TO ORDER

SV08-31		-	-	-	-	-
Option		Voltage		Termination (VDC)		
None (Blank)		Std. Coil		Std. Coil		
Manual Override M		0 Less Coil**		DS Dual Spades		
For Manual Override options see page 1.001.1		10 10 VDC†		DG DIN 43650		
		12 12 VDC		DL Leadwires (2)		
		24 24 VDC		DL/W Leads w/Weatherpak® Connectors		
		36 36 VDC		DR Deutsch DT04-2P		
Porting		48 48 VDC		Termination (VAC)		
Cartridge Only	0	24 24 VAC		Std. Coil		
SAE 6	6T	115 115 VAC		AG DIN 43650		
1/4 in. BSP*	2B	230 230 VAC		AP 1/2 in. Conduit		
*BSP Body; U.K. Mfr. Only				Termination (VDC)		
		E-Coil		E-Coil		
Seals		10 10 VDC		ER Deutsch DT04-2P (IP69K Rated)		
Buna N (Std.)	N	12 12 VDC		EY Metri-Pack® 150 (IP69K Rated)		
Fluorocarbon	V	20 20 VDC				
Polyurethane	P	24 24 VDC				

Coils with internal diode are available. Consult factory.