




## Overview

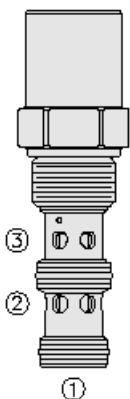

### Description

EC12-32 is a screw-in, cartridge style, load sense, flow on demand, pressure compensator valve.

### Operation


With inlet flow at port 2, the EC12-32 will deliver required flow at port 3 regardless of load pressure sensed at port 1.

**note:** 0.53 mm 0.021in orifice is recommended to be installed in load sense line at port 1 for better stability.

### Features

- Choice of compensator springs
- Hardened parts for long life.
- Quiet, modulated response.
- Industry-common cavity.

### Symbol



## Ratings

### Pressure Ratings

Pressure rating 241 bar (3500 psi)

### Flow Ratings

Flow rating	57 lpm (15.0 gpm)	- <b>Note:</b> With 5.5 bar (80 psi) compensating spring
	76 lpm (20.0 gpm)	- <b>Note:</b> With 7.6 bar (110 psi) compensating spring
	83 lpm (22.0 gpm)	- <b>Note:</b> With 11.0 bar (160 psi) compensating spring
	114 lpm (30.0 gpm)	- <b>Note:</b> With 15.2 bar (220 psi) compensating spring
Maximum internal leakage	49 ml/min (3.0 in <sup>3</sup> /min)	- <b>Note:</b> At port 1 with 241 bar (3500 psi) at port 2 (port 3 blocked)

### Temperature Ratings

Operating fluid temperature	-40 to 100 °C (-40 to 212 °F)	- <b>Note:</b> With buna N seals
	-26 to 204 °C (-15 to 400 °F)	- <b>Note:</b> With fluorocarbon seals
	-54 to 107 °C (-65 to 225 °F)	- <b>Note:</b> With polyurethane seals
Storage temperature	-40 to 70 °C (-40 to 160 °F)	
Ambient temperature	-40 to 70 °C (-40 to 160 °F)	

### Other Ratings

Corrosion protection 960 hr salt spray per ASTM b117 (model number - gec12-32)

## Operating Parameters


Fluids	Mineral based or synthetic hydraulic fluid with lubricating properties
Fluid viscosity range	7.4 to 420 cSt
Maximum operating contamination level	18/16/13 per ISO 4406

## Properties


Unit weight	0.39 kg (0.87 lb)
Internal wetted surface area	258.4 cm <sup>2</sup> (40.05 in <sup>2</sup> )



## Performance

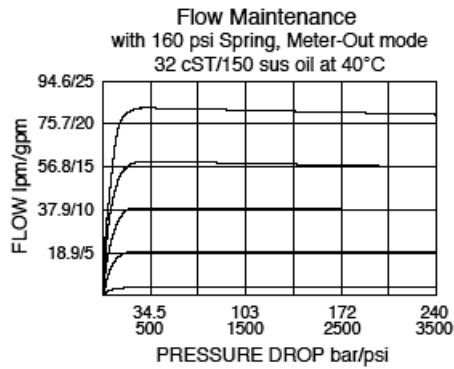

## Dimensions

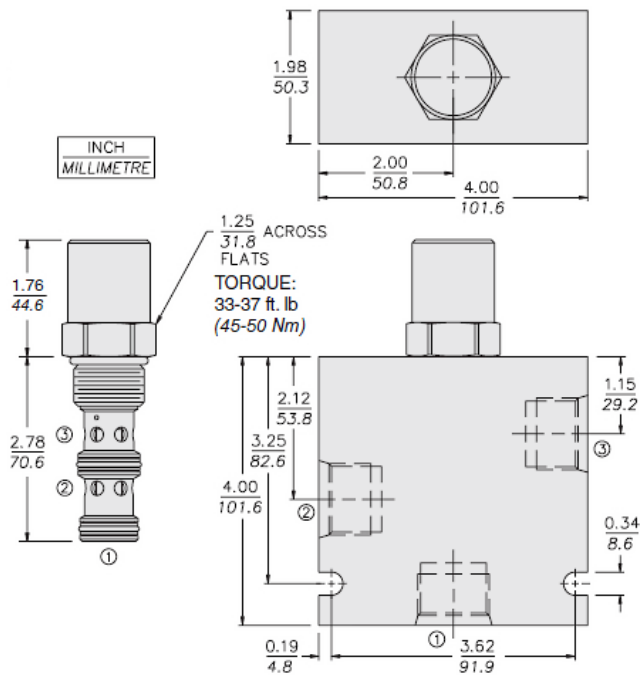

## Installation Specifications

Cavity	VC12-3
Cartridge installation torque	45 to 50 N-m (33 to 37 ft-lb)
Maximum allowable torque	67.8 N-m (50 ft-lb)
Orientation restriction	None

## Accessories

Seal kit	SK12-3X-MM	- <b>Note:</b> X = seal option
----------	------------	--------------------------------

