




Overview

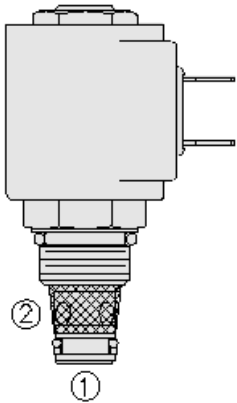

Description

The SP08-22 is a solenoid operated, 2-way, normally closed, poppet-type, proportional, screw-in hydraulic cartridge valve, designed for low leakage blocking and load holding applications.


Operation

When de-energized, the SP08-22 acts as a check valve, allowing flow from 1 to 2, while blocking flow from 2 to 1. When energized, the poppet lifts to open the 2 to 1 flow path. Valve has a free reverse flow check to allow flow 1 to 2 when energized.

Features

- Continuous-duty rated coil.
- Hardened steel work surfaces.
- Optional waterproof E-Coils rated up to IP69K.
- Industry common cavity.
- Compact size.

Symbol



Ratings

Pressure Ratings

Pressure rating 207 bar (3000 psi)

Flow Ratings

Maximum internal leakage 5 drops/min - **Note:** At 207 bar (3000 psi)

Temperature Ratings

Operating fluid temperature -40 to 120 °C (-40 to 250 °F) - **Note:** With buna N seals
-30 to 205 °C (-20 to 400 °F) - **Note:** With fluorocarbon seals
-50 to 80 °C (-60 to 175 °F) - **Note:** With polyurethane seals

Operating Parameters

Filtration requirements ISO 4406 16/13

Properties





Materials steel with hardened work surfaces zinc-plated exposed surfaces

Electrical Parameters

Dither PWM frequency 70 Hz




Performance

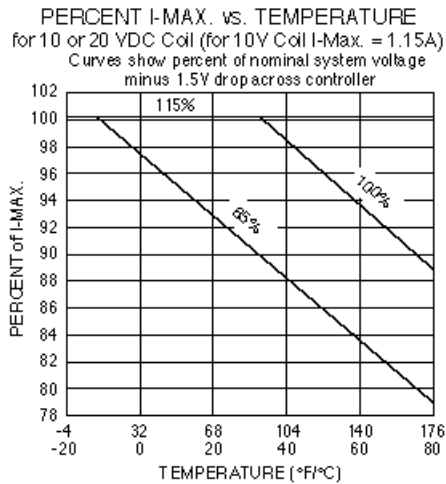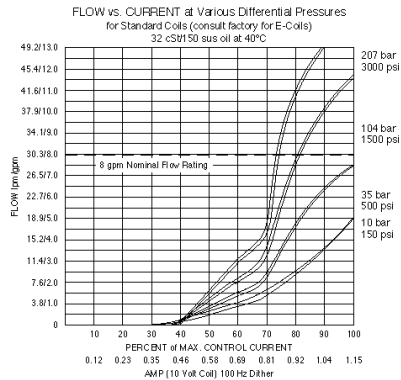

Dimensions

COIL MUST BE INSTALLED
WITH LETTERING UP

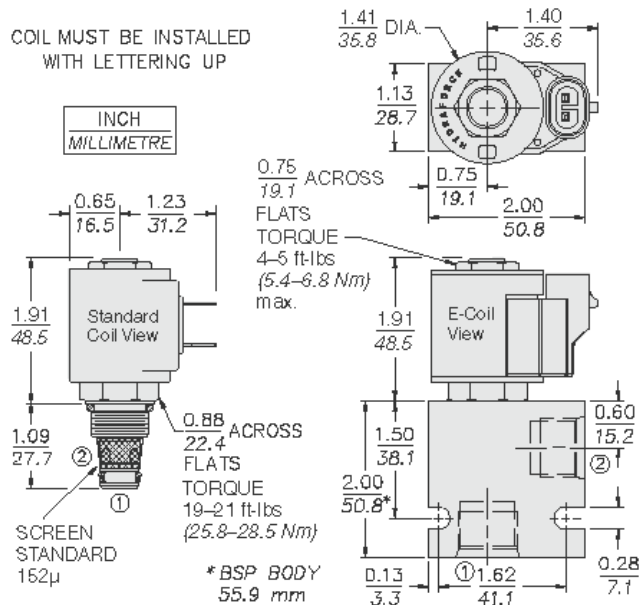

Installation Specifications

Cavity	VC08-2
Cartridge installation torque	25.8 to 28.5 N-m (19 to 21 ft-lb)
Coil nut torque	5.4 to 6.8 N-m (4 to 5 ft-lb)

Order Code

SP08-22	-	-	-	-	-
Option	None (Blank)	Voltage	DS	Termination (VDC)	Std. Coil
Porting	Cartridge Only	0	Less Coil**	DG	DIN 43650
SAE 4	4T	10	10 VDC†	DL	Leadwires (2)
SAE 6	6T	12	12 VDC	DL/W	Leads w/Weatherpak® Connectors
1/4 in. BSP*	2B	20	20 VDC†	DR	Deutsch DT04-2P
3/8 in. BSP*	3B	24	24 VDC	ER	Deutsch DT04-2P (IP69K Rated)
*BSP Body; U.K. Mfr. Only		**Includes Coil Nut		EY	Metri-Pack® 150.2A (IP69K Rated)
		†10 VDC and 20 VDC coils should be used for most continuous-duty applications. Consult factory.			
		Seals			
		N Buna N (Std.)			
		V Fluorocarbon			
		P Polyurethane			

Coils with internal diode are available. Consult factory.



Model Options

SP08-22E-H-J-L

E Manual Override

CODE	DESCRIPTION
BLANK	NONE
J	Momentary Pull Override, #10-32 threads
M	Two Position Override, Red Knurled Knob
T	Variable Position Override, Red Knurled Knob
Y	Momentary Pull Override, Red Knurled Knob

H Line Body

CODE	DESCRIPTION
0	No Body
4T	Aluminum SAE 4
6T	Aluminum SAE 6
8T	Aluminum SAE 8
6TD	Ductile Iron SAE 6
8TD	Ductile Iron SAE 8
2B	Aluminum BSPP 1/4" (2)
3B	Aluminum BSPP 3/8" (3)
3BD	Ductile Iron BSPP 3/8" (3)

J Seal

CODE	DESCRIPTION
N	Buna-N
V	Fluorocarbon
P	Polyurethane
U	PPDI Urethane

L Coil

CODE	DESCRIPTION
0	No Coil
10DL	10 VDC, D-Coil, Dual Lead Wires
10DS	10 VDC, D-Coil, Dual Spade
10EL	10 VDC, E-Coil, Dual Lead Wires, 18 inches long
10EL/36	10 VDC, E-Coil, Dual Lead Wires, 36 inches long
10ER	10 VDC, E-Coil, Deutsch
12DG	12 VDC, D-Coil, DIN 43650
12DL	12 VDC, D-Coil, Dual Lead Wires, 18 inches long
12DL/36	12 VDC, D-Coil, Dual Lead Wires, 36 inches long
12DL/W	12 VDC, D-Coil, Dual Lead Wires with Weatherpak
12DR	12 VDC, D-Coil, Deutsch
12DS	12 VDC, D-Coil, Dual Spade
12EG	12 VDC, E-Coil, DIN 43650
12EJ	12 VDC, E-Coil, AMP Jr.



CODE	DESCRIPTION
12EL	12 VDC, E-Coil, Dual Lead Wires, 18 inches long
12EL/36	12 VDC, E-Coil, Dual Lead Wires, 36 inches long
12ER	12 VDC, E-Coil, Deutsch
12EY	12 VDC, E-Coil, Metri-Pack 150
20DG	20 VDC, D-Coil, DIN 43650
20DS	20 VDC, D-Coil, Dual Spade
20ER	20 VDC, E-Coil, Deutsch
24AG	24 VDC, D-Coil, DIN 43650
24AP	24 VDC, D-Coil, 1/2" Conduit and Dual Lead Wires
24DG	24 VDC, D-Coil, DIN 43650
24DL	24 VDC, D-Coil, Dual Lead Wires, 18 inches long
24DL/36	24 VDC, D-Coil, Dual Lead Wires, 36 inches long
24DL/W	24 VDC, D-Coil, Dual Lead Wires with Weatherpak
24DR	24 VDC, D-Coil, Deutsch
24DS	24 VDC, D-Coil, Dual Spade
24EG	24 VDC, E-Coil, DIN 43650
24EJ	24 VDC, E-Coil, AMP Jr.
24ER	24 VDC, E-Coil, Deutsch
24EY	24 VDC, E-Coil, Metri-Pack 150
36DG	36 VDC, D-Coil, DIN 43650
36DS	36 VDC, D-Coil, Dual Spade