


Check valve

Overview

SYMBOL

**Description**

The ICV06-20 is an in-line hydraulic check valve for use as a blocking or load-holding device.

Operation

The in-line valve allows flow from port 1 to 2, WHILE normally blocking flow in the opposite direction. The valve has a fully guided check poppet which is spring biased closed until sufficient pressure is applied at port 1 to open to port 2.

Ratings**Pressure Ratings**

Pressure rating: 5000 psi [345 bar]

Flow Ratings

Flow rating: See graph

Maximum internal leakage: 2 drops/min [0.10 ml/min] note: At 5000 psi [345 bar]

Temperature Ratings

Operating fluid temperature: (Fluorocarbon) -15 °f to 400 °f [-26 °c to 204 °c]

Storage temperature: -40 °f to 160 °f [-40 °c to 70 °c]

Ambient temperature: -40 °f to 160 °f [-40 °c to 70 °c]

Operating Parameters

Fluids: Mineral based or synthetic hydraulic fluid with lubricating properties

Fluid viscosity range: 7.4 to 420 cSt

Maximum operating contamination level: 20/18/14 per ISO 4406


Properties

Unit weight: 0.10 lb [0.05 kg]

Internal wetted surface area: 4.6 in² [29.8 cm²]

Check valve

Performance

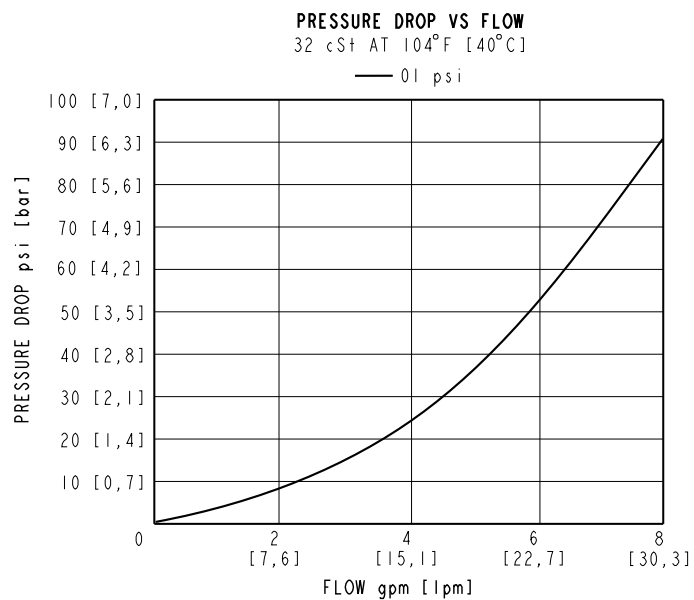


Check valve

Dimensions

INCH
[mm]

OUTLINE

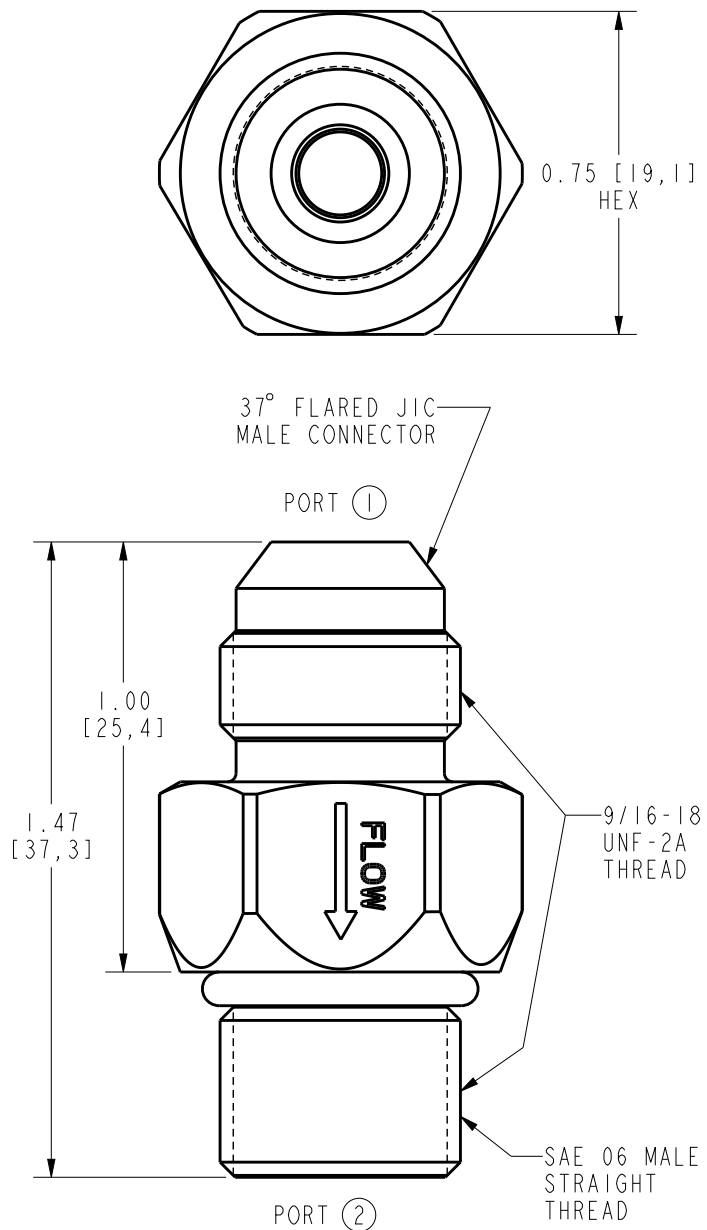

ALL DIMENSIONS ARE FOR REFERENCE ONLY

Installation Specifications

Cavity: SAE 06 port

Cartridge installation torque: 19-21 ft-lb [25.8-28.5 N-m]

Orientation restriction: None

Check valve

Order Code

ORDERING INFORMATION:

ICV06-20-0-V-XX

BASE MODEL NUMBER

SEALS:

90 DUROMETER FLUOROCARBON - V

BIAS SPRING VALUE:

01 psi [0,07 bar] - 01

Model Options

ICV06-20-0-J-R

J Seal

CODE	DESCRIPTION
V	90 Durometer Fluorocarbon

R Bias Spring Value

CODE	DESCRIPTION
01	0.07 bar [01 psi]