


Flangeable elements with Cross Piloted Counterbalance Valves

EDM-VB

RE 18301-43

Edition: 02.2016

Replaces: 07.2012

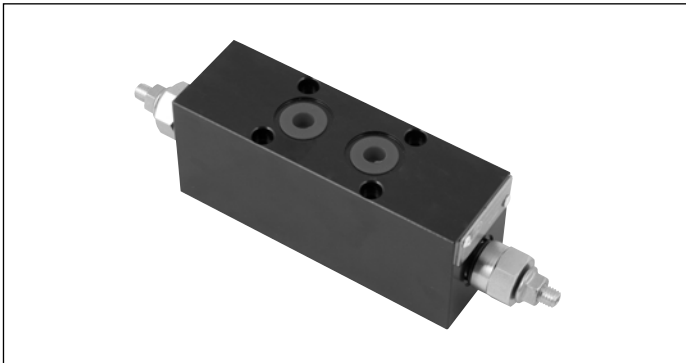

Description

The secondary flangeable elements EDM-VB-__ can be interfaced and bolted on top of the A and B ports of the ED elements of the Directional Valve Assembly.

They incorporate one or two Cross Piloted Counterbalance Valves which allow free flow toward the A and B outlet ports, and lock in a leak free mode the flow returning from the actuator. Pilot pressure in the opposite line reduces the pressure setting of the counterbalance valve in proportion to the pilot ratio (4:1) until opening and allowing the flow return from the actuator.

The pressure setting should be at least 1,3 times the highest expected load.

Depending on the version selected (02AB, 020A or 020B), the counterbalance function can be double-acting or single-acting, upstream or downstream, in both A and B ports, or in A port only, or in B port only (see hydraulic symbols).

The body of the EDM-VB elements is made of Black Anodized Aluminium. Hydraulic Ports A and B are size G 3/8.

Technical data

General

Weight of manifold, with two counterbalance valves EDM-VB-AB	kg (lbs)	1.2 (2.65)
--	----------	------------

Weight of manifold, with one counterbalance valve EDM-VB-0A	kg (lbs)	1.02 (2.24)
---	----------	-------------

Ambient Temperature	°C (°F)	-20....+50 (-4....+122) (NBR seals)
---------------------	---------	--

Hydraulic

Maximum pressure	bar (psi)	250 (3625)
------------------	-----------	------------

Maximum flow	l/min (gpm)	40 (10.5)
--------------	-------------	-----------

Hydraulic fluid General properties: it must have physical lubricating and chemical properties suitable for use in hydraulic systems such as, for example:	Mineral oil based hydraulic fluids HL (DIN 51524 part 1). Mineral oil based hydraulic fluids HLP (DIN 51524 part 2). For use of environmentally acceptable fluids (vegetable or polyglycol base) please consult us.
--	---


Fluid Temperature	°C (°F)	-20....+80 (-4....+176) (NBR)
-------------------	---------	-------------------------------

Permissible degree of fluid contamination	ISO 4572: $\beta_{x \geq 75} X = 10 \dots 12$ ISO 4406: class 19/17/14 NAS 1638: class 8
---	--

Viscosity range	mm ² /s	5....420
-----------------	--------------------	----------

Note

For applications with different specifications consult us

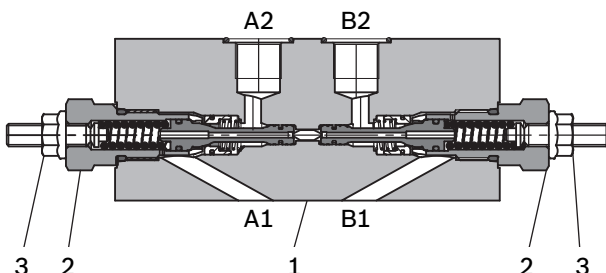

Ordering details

01	02	03	04	05	06		
L	88	35		35	00		0
Family							
01	Directional Valve elements ED						L
Model							
02	Flangeable element secondary valves						88
Type							
03	Cross Piloted Counterbalance Valves						35
Configuration							
04	Counterbalance Valves for both A and B ports						02AB
	Counterbalance Valve for port A only						020A
	Counterbalance Valve for port B only						020B ³⁾
Counterbalance pressure range ¹⁾							
05	100-250bar (1440-3626 psi)						35
Ports							
06	G 3/8 DIN 3852						0
	9/16-18 UNF 2-B (SAE 6)						1 ²⁾

1)

Configuration 02AB with fixed spring setting (160 bar (2300 psi) or 210 bar (3000 psi) or 250 bar (3600 psi)) available on request.


2)

Available only for configuration 02AB


3)

The version "020B" is similar to "020A" by rotating the block of 180°.

Symbols

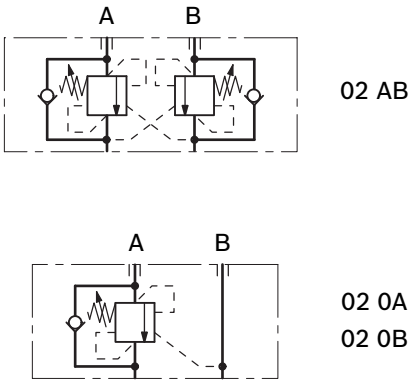

Characteristic curves

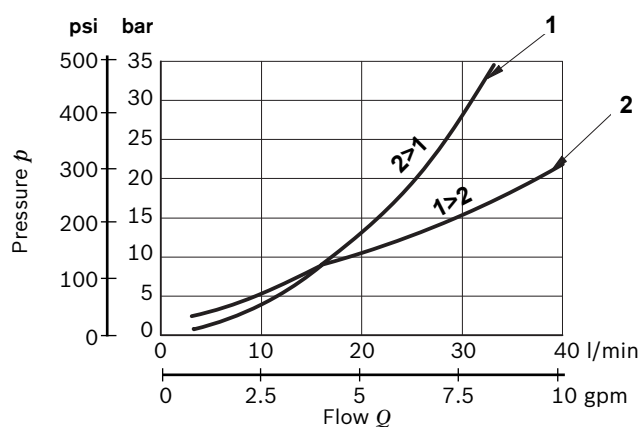


Pressure drop	Curve no.
Fully piloted	1
Through check valve	2


Measured with hydraulic fluid ISO-VG32 at $45^{\circ} \pm 5^{\circ} \text{C}$
($113^{\circ} \pm 9^{\circ} \text{F}$); ambient temperature 20°C (68°F).

External dimensions and fittings

L8835020AB _ _

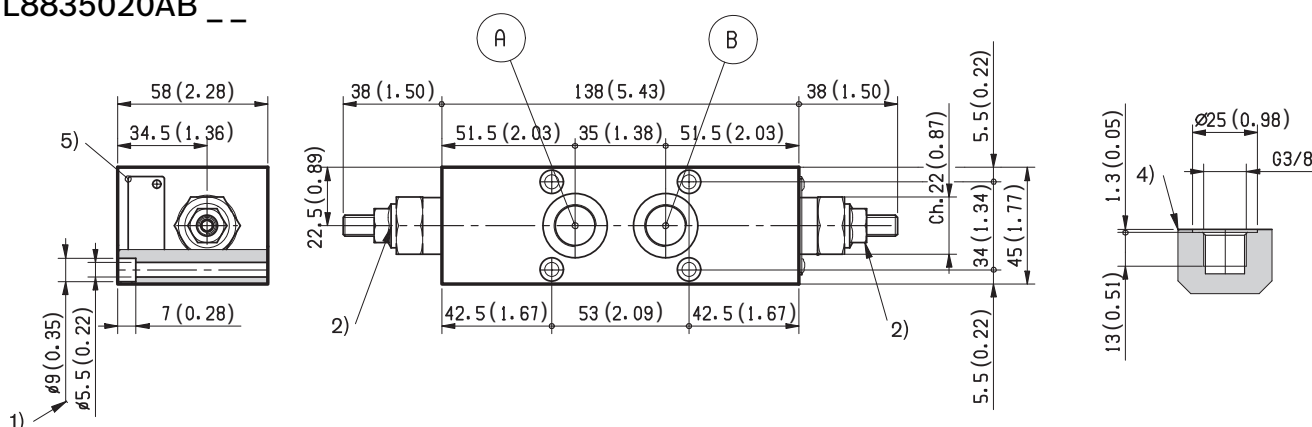

L8835020A _ _

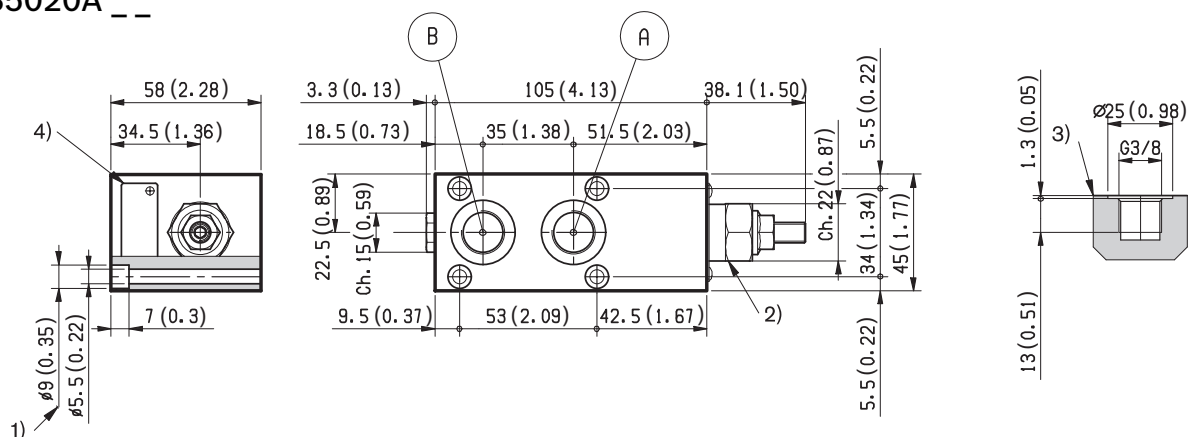

- 1 Four through holes $\varnothing 5.5$ mm (0.217 inch) for screws and tightening torques see data sheet RE 18301-90.
- 2 Counterbalance valve with screw type adjustment.

- 3 A1 and B1 ports for the actuator.
- 4 Identification label.

Bosch Rexroth Oil Control S.p.A.

Oleodinamica LC Division
Via Artigianale Sedrio, 12
42030 Vezzano sul Crostolo
Reggio Emilia - Italy
Tel. +39 0522 601 801
Fax +39 0522 606 226 / 601 802
compact-hydraulics-cdv@boschrexroth.com
www.boschrexroth.com/compacthydraulics

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.A.. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.
Subject to change.