

Check and Metering E-valve


PATENTED

E-valve 5.0

RE 18309-24

Edition: 11.2022

Replaces: 04.2022

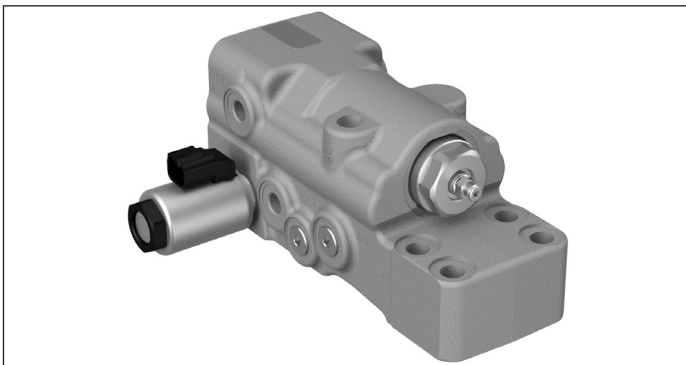

Size 5.0

Series E-valve

Maximum operating pressure: 420 bar (6090 psi)

Max. flow: 500 l/min. (132 gpm)

Description


The electro hydraulic check and metering E-valve for excavators prevents uncontrolled lowering of the actuator in case of hose failure and provides the load holding when the joystick is released in neutral position. Lifting operations are performed with very limited pressure losses across the valve. The valve includes also a pressure relief stage (1) which prevents any overloads into the cylinder. The actuation of the valve is performed by energizing the electro-proportional pilot stage (2) whose setting and characteristic curve are determined by changing the electrical parameters. Based on the two stages opening principle (2, 3), the valve provides flow metering from the cylinder to the main control valve and offers the possibility to change the behavior of the machine only by adjusting the pilot stage parameters. For safety reasons, the valve is directly mounted on the cylinder flange and provides a compact installation with the elimination of the pilot piping and the positioning of all hydraulic ports on the back surface. The valve is also equipped with a by-pass function (4) which can be used for emergency boom lowering in case of power supply failure.

Main Field of Application

Excavators
Material Handlers

Contents

Technical data	2
Characteristic curves	2
External dimensions and fittings	3
Application examples	4
Ordering details	5

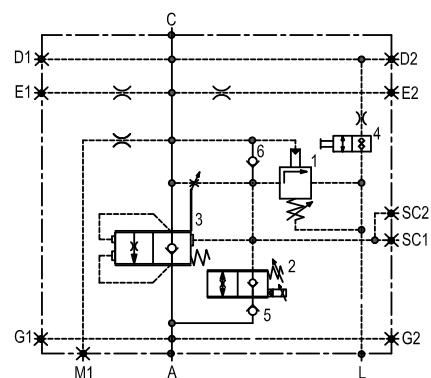

Note

Ports D2, E1, E2, SC2, G1, G2, M1 to be drilled on request.

Port identified with D1 and SC1 are not protected with calibrated orifice but in direct connection with pressure channels.

Technical data

General			
Weight	kg (lbs)	9.30 (20.50)	
Manifold material		Zinc plated cast iron	
Ambient temperature range	°C (°F)	-30....+110 (-22....+230)	
Salt spray test	h	500	
Hydraulic			
Max. operating pressure	bar (psi)	420 (6090)	
Max. pressure at C-A ports	bar (psi)	420 (6090)	
Max. pressure at L port	bar (psi)	25 (362.6)	
Max. flow	l/min. (gpm)	500 (132)	
Opening current range	mA	600 - 1600 (Voltage 12 V) and 350 - 700 (Voltage 24 V)	
Setting		Cracking pressure of main stage (3) with 100 bar load pressure.	
Fluid		Mineral oil (HL, HLP) according DIN 51524	
Fluid temperature range	°C (°F)	-30....+100 (-22....+212)	
Viscosity range	mm²/s	15....380	
Permissible degree of fluid contamination		Class 19/17/14 according to ISO 4406	
Other technical data		see data sheet 18350-50	
Electrical			
Type of voltage		DC Voltage	
Standard Voltage	V	12 DC ± 15%	24 DC ± 15%
Power	W	20 (cold coil at 20°C)	20 (cold coil at 20°C)
Resistance at 20°C	Ω	2.3 ± 5%	11.5 ± 5%
Resistance at max. hot valve (Rmax)	Ω	3.8	18.5
Max. current (Imax)	mA	1760	800
Minimum terminal voltage to get Imax at Rmax	V	6.7	14.5
Duty cycle ED		100%	100%
Insulation class of coil		H	H
Coil protection		IP 69K	IP 69K
Coil weight	kg (lbs)	0.24 (0.53)	0.24 (0.53)
Coil connector		DT04-2P DEUTSCH	DT04-2P DEUTSCH
Recommended dither freq. (PWM)	Hz	200	200


Note

for applications outside these parameters, please consult us.

Characteristic curves


$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic

Lifting (A->C)

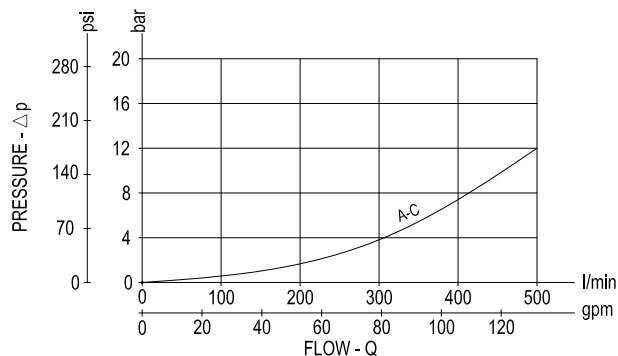

$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic

Lowering (C->A), main stage (3) completely open.

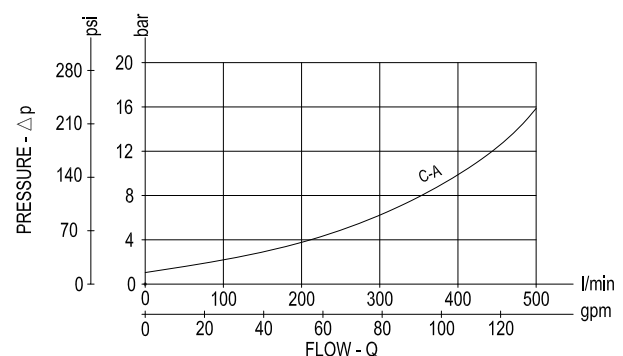

Measured with hydraulic fluid ISO-VG46 at 36° ± 2 °C (97° ± 36 °F); ambient temperature 23 °C (73 °F).

Technical drawing of the 3292 hydraulic pump assembly, showing four views: front, top, side, and rear. The drawing includes detailed dimensions in millimeters and inches, as well as labels for various components and ports.

Front View Dimensions:

- Overall width: 215 (8.46)
- Overall height: 99 (3.9)
- Port A: 28 (1.1)
- Port B: 28 (1.1)
- Port C: 28 (1.1)
- Port D: 28 (1.1)
- Port E: 28 (1.1)
- Port F: 28 (1.1)
- Port G: 28 (1.1)
- Port H: 28 (1.1)
- Port I: 28 (1.1)
- Port J: 28 (1.1)
- Port K: 28 (1.1)
- Port L: 28 (1.1)
- Port M: 28 (1.1)
- Port N: 28 (1.1)
- Port O: 28 (1.1)
- Port P: 28 (1.1)
- Port Q: 28 (1.1)
- Port R: 28 (1.1)
- Port S: 28 (1.1)
- Port T: 28 (1.1)
- Port U: 28 (1.1)
- Port V: 28 (1.1)
- Port W: 28 (1.1)
- Port X: 28 (1.1)
- Port Y: 28 (1.1)
- Port Z: 28 (1.1)

Top View Dimensions:

- Overall width: 119 (4.69)
- Overall height: 70 (2.76)
- Port A: 28 (1.1)
- Port B: 28 (1.1)
- Port C: 28 (1.1)
- Port D: 28 (1.1)
- Port E: 28 (1.1)
- Port F: 28 (1.1)
- Port G: 28 (1.1)
- Port H: 28 (1.1)
- Port I: 28 (1.1)
- Port J: 28 (1.1)
- Port K: 28 (1.1)
- Port L: 28 (1.1)
- Port M: 28 (1.1)
- Port N: 28 (1.1)
- Port O: 28 (1.1)
- Port P: 28 (1.1)
- Port Q: 28 (1.1)
- Port R: 28 (1.1)
- Port S: 28 (1.1)
- Port T: 28 (1.1)
- Port U: 28 (1.1)
- Port V: 28 (1.1)
- Port W: 28 (1.1)
- Port X: 28 (1.1)
- Port Y: 28 (1.1)
- Port Z: 28 (1.1)

Side View Dimensions:

- Overall width: 116 (4.57)
- Overall height: 40.5 (1.59)
- Port A: 28 (1.1)
- Port B: 28 (1.1)
- Port C: 28 (1.1)
- Port D: 28 (1.1)
- Port E: 28 (1.1)
- Port F: 28 (1.1)
- Port G: 28 (1.1)
- Port H: 28 (1.1)
- Port I: 28 (1.1)
- Port J: 28 (1.1)
- Port K: 28 (1.1)
- Port L: 28 (1.1)
- Port M: 28 (1.1)
- Port N: 28 (1.1)
- Port O: 28 (1.1)
- Port P: 28 (1.1)
- Port Q: 28 (1.1)
- Port R: 28 (1.1)
- Port S: 28 (1.1)
- Port T: 28 (1.1)
- Port U: 28 (1.1)
- Port V: 28 (1.1)
- Port W: 28 (1.1)
- Port X: 28 (1.1)
- Port Y: 28 (1.1)
- Port Z: 28 (1.1)

Rear View Dimensions:

- Overall width: 119 (4.69)
- Overall height: 70 (2.76)
- Port A: 28 (1.1)
- Port B: 28 (1.1)
- Port C: 28 (1.1)
- Port D: 28 (1.1)
- Port E: 28 (1.1)
- Port F: 28 (1.1)
- Port G: 28 (1.1)
- Port H: 28 (1.1)
- Port I: 28 (1.1)
- Port J: 28 (1.1)
- Port K: 28 (1.1)
- Port L: 28 (1.1)
- Port M: 28 (1.1)
- Port N: 28 (1.1)
- Port O: 28 (1.1)
- Port P: 28 (1.1)
- Port Q: 28 (1.1)
- Port R: 28 (1.1)
- Port S: 28 (1.1)
- Port T: 28 (1.1)
- Port U: 28 (1.1)
- Port V: 28 (1.1)
- Port W: 28 (1.1)
- Port X: 28 (1.1)
- Port Y: 28 (1.1)
- Port Z: 28 (1.1)

Other Dimensions:

- Port A: 28 (1.1)
- Port B: 28 (1.1)
- Port C: 28 (1.1)
- Port D: 28 (1.1)
- Port E: 28 (1.1)
- Port F: 28 (1.1)
- Port G: 28 (1.1)
- Port H: 28 (1.1)
- Port I: 28 (1.1)
- Port J: 28 (1.1)
- Port K: 28 (1.1)
- Port L: 28 (1.1)
- Port M: 28 (1.1)
- Port N: 28 (1.1)
- Port O: 28 (1.1)
- Port P: 28 (1.1)
- Port Q: 28 (1.1)
- Port R: 28 (1.1)
- Port S: 28 (1.1)
- Port T: 28 (1.1)
- Port U: 28 (1.1)
- Port V: 28 (1.1)
- Port W: 28 (1.1)
- Port X: 28 (1.1)
- Port Y: 28 (1.1)
- Port Z: 28 (1.1)

Labels:

- 1: Port A
- 2: Port B
- 3: Port C
- 4: Port D
- 5: Port E
- 6: Port F
- 7: Port G
- 8: Port H
- 9: Port I
- 10: Port J
- 11: Port K
- 12: Port L
- 13: Port M
- 14: Port N
- 15: Port O
- 16: Port P
- 17: Port Q
- 18: Port R
- 19: Port S
- 20: Port T
- 21: Port U
- 22: Port V
- 23: Port W
- 24: Port X
- 25: Port Y
- 26: Port Z

Notes:

- O-Ring 32.92x3.53 [1.3x0.14] on 1" SAE 6000 port
- Patented

Ports	Std. size
L	G1/4 - BSPP ISO 1179-1
Optional ports: D2, E1, E2, SC2, G1, G2, M1 - to be drilled on request	G1/4 - BSPP ISO 1179-1

Ordering details

01	02	03	04	05	06	07
0G.E5	—	—	—	0	—	—

Family

01	Check and Metering E-valve 5.0	0G.E5
----	--------------------------------	--------------

A-C Flange

02	3/4 SAE 6000	2
	1 SAE 6000	3

Application

03	Single Operation. D2, E1, E2, SC2, G1, G2, M1 ports not drilled.	00
	Parallel operation. Left version. D2, E2, SC2, G1, G2, M1 ports not drilled.	01
	Parallel operation. Right version. D2, E1, SC2, G1, G2, M1 ports not drilled.	02

Ports

04	G1/4 - BSPP ISO 1179-1	G
	G1/4 - JIS B 2351-90	J
	9/16-18 - SAE UNF 2B ISO 11926-1	U

Main stage

05	Spool Type	0
----	------------	----------

Pilot stage

06	12 V	1
	24 V	2

Valve 1	Adj. pressure range bar (psi)	Pres. increase bar/turn (psi/turn)	Std. setting bar (psi) 5 l/min	
07	300-460 (4350-6700)	168 (2436)	350 (5000)	35
	300-460 (4350-6700)	168 (2436)	420 (6090)	42

Flange seal kit

E00000000000002 (R930004532) C flange 3/4 SAE 6000
E00000000000003 (R930004533) C flange 1 SAE 6000

Type	Material number
0GE5300G0242000	R930083563
0GE5301G0242000	R930083564
0GE5302G0242000	R930083566

Bosch Rexroth Oil Control S.p.A.

Via Leonardo da Vinci 5
P.O. Box no. 5
41015 Nonantola – Modena, Italy
Tel. +39 059 887 611
Fax +39 059 547 848
compact-hydraulics-pib@boschrexroth.com
www.boschrexroth.com/compacthydraulics

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.A. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging. Subject to change.