

Flow regulator 2 way, pressure compensated

RE 18309-33

Edition: 03.2016 Replaces: 04.2010

VRFC2 0M.22.03 - X - Y



Description

A constant flow rate, regardless of system pressures, is established from E to R, while a minimum pressure differential of approximately 5 bar (70 psi) exists between the two ports. Output flow can be varied from zero (closed) to the nominal maximum rating. Reverse flow from R to E is limited by the selected opening of the restrictor and is not pressure compensated.

Technical data


Operating pressure	up to 210 bar (3000 psi)	
Q= max. inlet flow "E" port (see "Dimensions")		
Flow range adjustment	0 - 3 turns	
Weight	see "Dimensions"	
Manifold material	Aluminium	


Note: aluminium bodies are often strong enough for operating pressures exceeding 210 bar (3000 psi), depending from the fatigue life expected in the specific application. If in doubt, consult our Service Network.


Fluid	Mineral oil (HL, HLP) according DIN 51524
Fluid temperature range	-30 °C to 100 (-22 to 212 °F)
Viscosity range	5 to 800 mm ² /s (cSt)
Recommended degree of fluid contamination	Class 19/17/14 according to ISO 4406
Other technical data	see data sheet 18350-50


Note: for applications outside these parameters, please consult us.


Characteristic curve












Υ



Port sizes	E-R
02	G 3/8
03	G 1/2
04	G 3/4
05	G 1


Preferred types

2

Туре	Material number
0M2203700200000	R930004181
0M2203700300000	R930004182
0M2203700400000	R930004183
0M2203700500000	R930004184
0M2203800200000	R930004190
0M2203800300000	R930004192

Туре	Material number
0M2203800400000	R930004193
0M2203800500000	R930004194
0M2203400200000	R930004169
0M2203400300000	R930004170
0M2203400400000	R930004171
0M2203400500000	R930004172

Dimensions

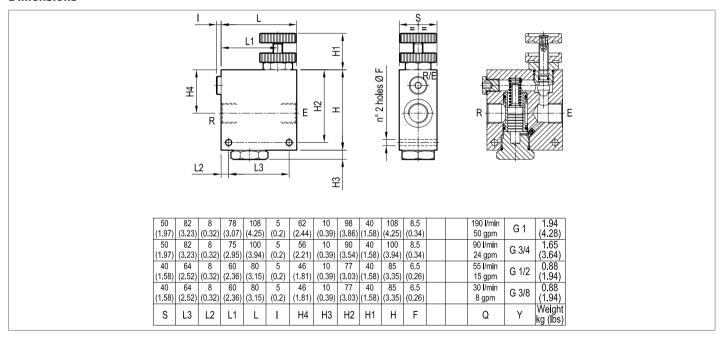

Bosch Rexroth Oil Control S.p.A.

Via Leonardo da Vinci 5

P.O. Box no. 5

41015 Nonantola - Modena, Italy

Tel. +39 059 887 611 Fax +39 059 547 848

compact-hydraulics-pib@boschrexroth.com www.boschrexroth.com/compacthydraulics

® This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.a.. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging. Subject to change.