

Relief, bi-directional direct acting poppet type differential area


Common cavity

Cartridge style in manifold

VSNG-10A-C

OR.03 - K - X - Y - Z - W

Dimensions

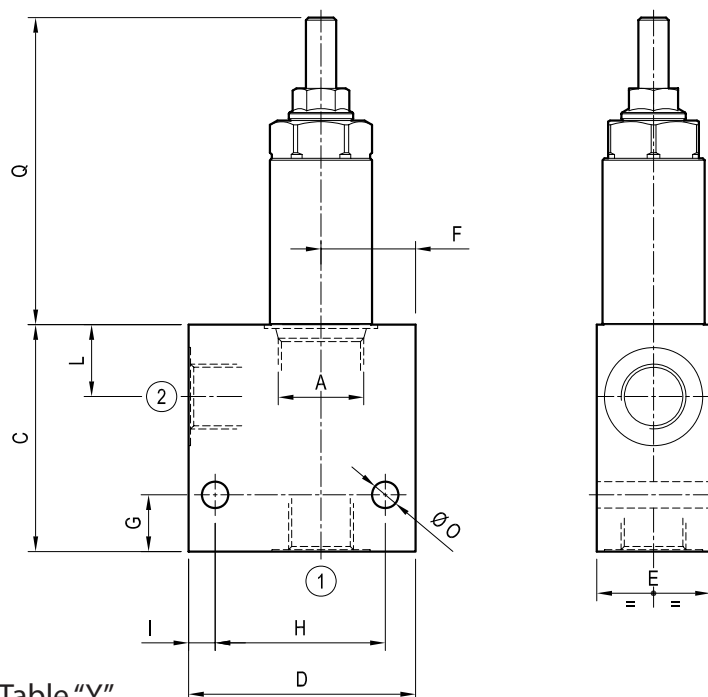

Technical data

Max flow:	up to 56 l/min	(15 gpm)
Max operating pressure for steel body:	350 bar	(5000 psi)
Max operating pressure for aluminium body:	210 bar	(3000 psi)

To order only manifold see data sheet RE 18325-85





Table "Y"

[illegible]

Cartridge style

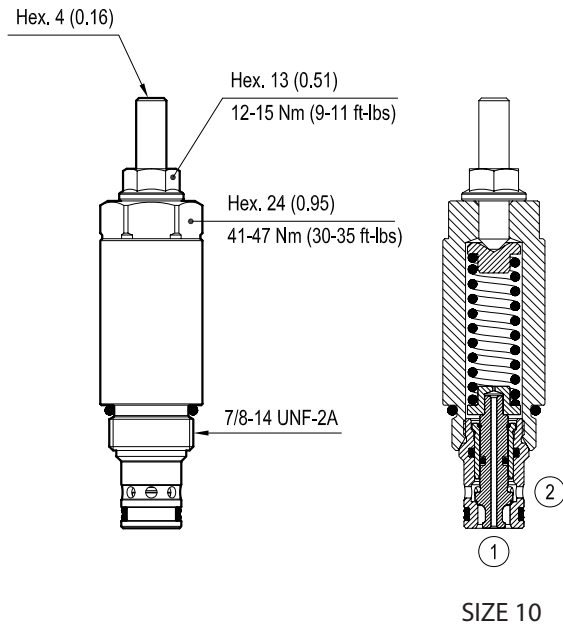

[mm (inches)]

Table "K"

			K				
CARTRIDGE CODE	04	11	59	X	85	Z	VSNG-10A

Table "X"

X	ADJUSTMENTS	
03	Leakproof hex. socket screw	


CARTRIDGE TECHNICAL DATA

Common cavity: CA-10A-2N
For other details see data sheet RE 18318-07

Table "Z"

[illegible]

Performance graph

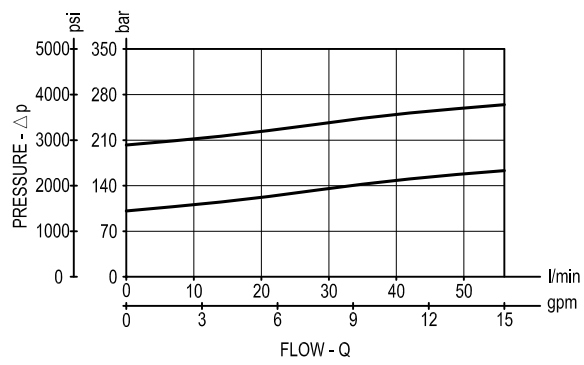

Ordering code

OR.03		K	X	Y	Z	W
Manifold with relief bi-directional direct acting poppet type differential area						Manifold material
						= 00 Aluminium manifold
						= S0 Steel manifold
Cartridge style - Common cavity (see table K on page 2)						Settings - Springs (see table Z on page 2)
Cartridge style - Adjustments (see table X on page 2)						Manifold style - Dimensions and port sizes (see table Y on page 1)

Preferred types (readily available)

Type	Material number	Type	Material number
OR0359030320S0	R934003476		

Further types available by request