

Pressure reducing and relieving, pilot operated spool type


Common cavity

Cartridge style in manifold

VRPX-10A-C

OR.09 - K - X - Y - Z - W

Dimensions

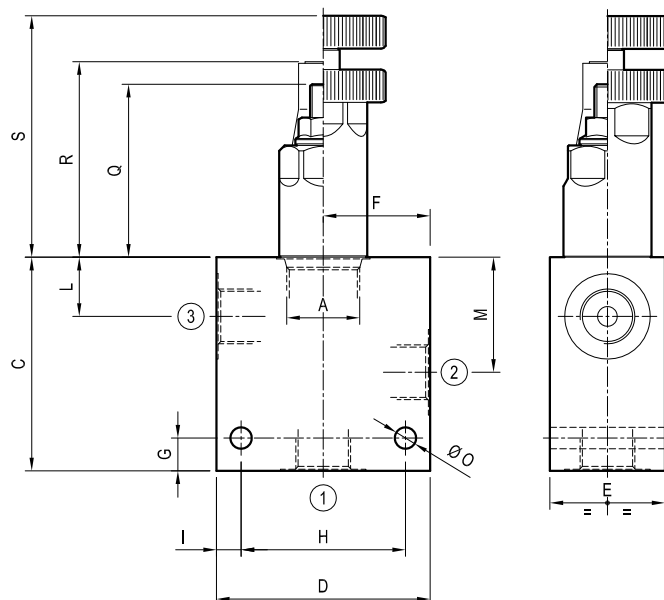

Technical data

Max flow:	up to 60 l/min	(16 gpm)
Max operating pressure for steel body:	350 bar	(5000 psi)
Max operating pressure for aluminium body:	210 bar	(3000 psi)

To order only manifold see data sheet RE 18325-85





Table "Y"

[illegible]

Cartridge style

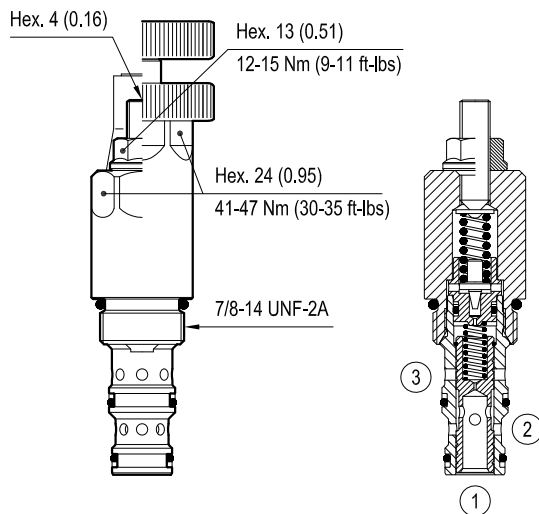

SIZE 10

[mm (inches)]

Table "K"

			K				
CARTRIDGE CODE	04	93	07	X	85	Z	VRPX-10A

Table "X"

X	ADJUSTMENTS		OPTIONS
03	Leakproof hex. socket screw		
04	Handknob and locknut		
			Ordering code 11.04.23.002


CARTRIDGE TECHNICAL DATA

Common cavity: CA-10A-3N
For other details see data sheet RE 18318-56

Table "Z"

[illegible]

Performance graph

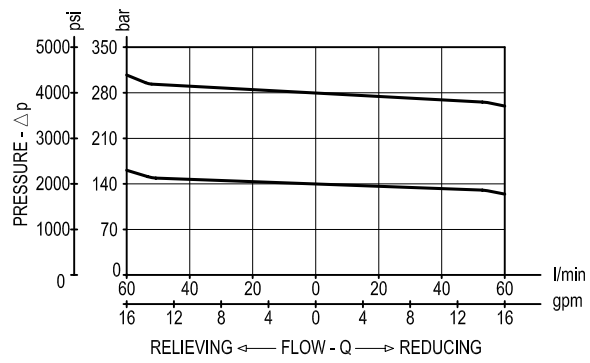

Ordering code

OR.09		K	X	Y	Z	W
Manifold with pressure reducing and relieving, pilot operated spool type						Manifold material
						= 00 Aluminium manifold
						= S0 Steel manifold
Cartridge style - Common cavity (see table K on page 2)						Settings - Springs (see table Z on page 2)
Cartridge style - Adjustments (see table X on page 2)						Manifold style - Dimensions and port sizes (see table Y on page 1)

Preferred types (readily available)

Type	Material number	Type	Material number
OR0907030310S0	R934000752		
OR0907030320S0	R934000631		

Further types available by request