

Relief, direct acting poppet type differential area


Common cavity

Cartridge style in manifold

VSDN-08A-C

OR.12 - K - X - Y - Z - W

Dimensions

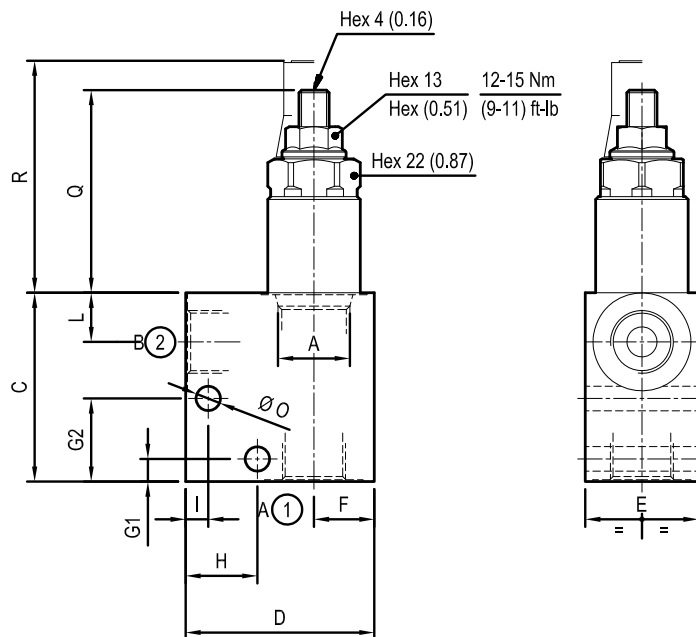

Technical data

Max flow:	up to 50 l/min	(13 gpm)
Max operating pressure for steel body:	350 bar	(5000 psi)
Max operating pressure for aluminium body:	210 bar	(3000 psi)

To order only manifold see data sheet RE 18325-85





Table "Y"

[illegible]

Performance graphs

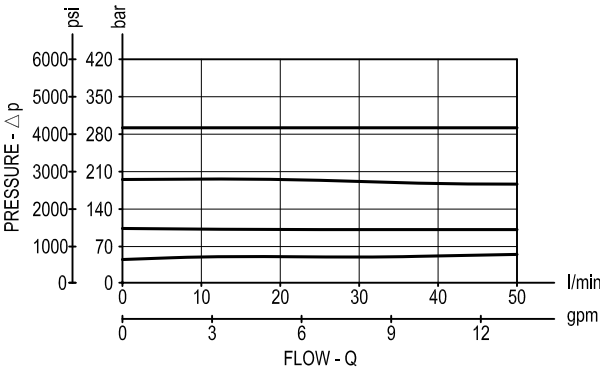

Ordering code

OR.12	K	X	Y	Z	W
Manifold with relief direct acting poppet type differential area					Manifold material = 00 Aluminium manifold = S0 Steel manifold
Cartridge style - Common cavity (see table K on page 2)					Settings - Springs (see table Z on page 2)
Cartridge style - Adjustments (see table X on page 2)				Manifold style - Dimensions and port sizes (see table Y on page 1)	

Preferred types (readily available)

[illegible]

Further types available by request