

Flow divider


Common cavity

Cartridge style in manifold

DSDN-C

ON.07 - K - 00 - Y - Z - W

Dimensions

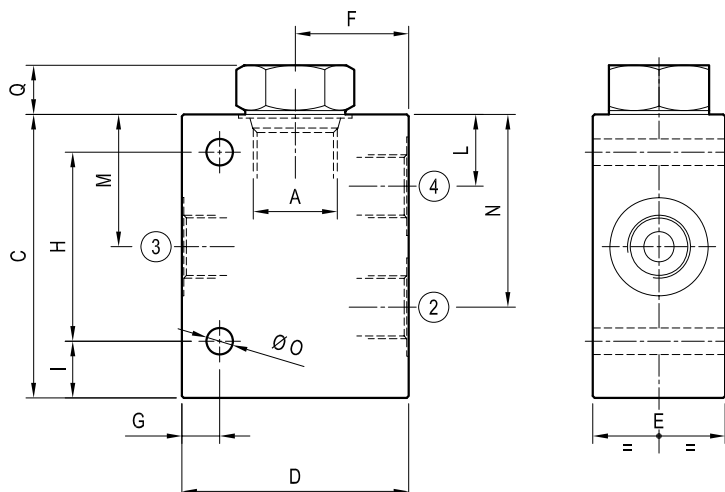

Technical data

Range of rated total flow: see table "Z"

Max operating pressure for steel body:	350 bar	(5000 psi)
Max operating pressure for aluminium body:	210 bar	(3000 psi)

To order only manifold see data sheet RE 18325-85





Table "Y"

[illegible]

Cartridge style

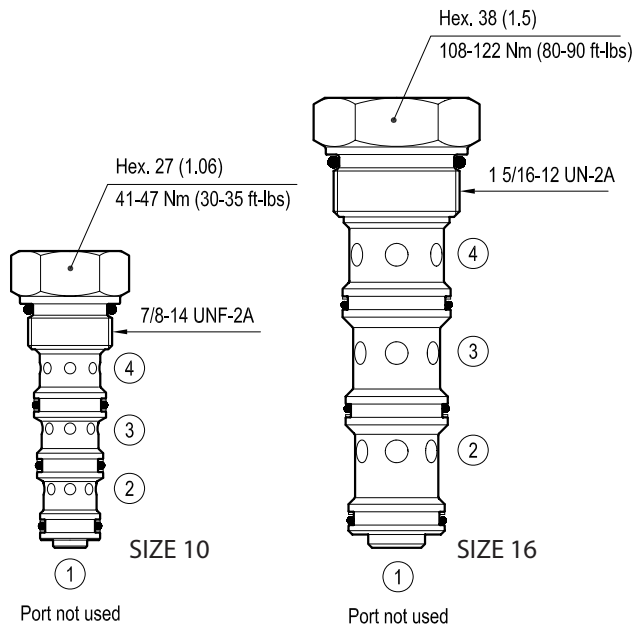

[mm (inches)]

Table "K"

			K				
CARTRIDGE CODE	04	05	04	00	85	Z	DSDN-10A
	04	05	03	00	27	Z	DSDN-16A



CARTRIDGE TECHNICAL DATA

Common cavity: CA-10A-4N / CA-16A-4N
For other details see data sheet RE 18321-22 and
RE18321-23

Table "Z"

[illegible]

Performance graphs

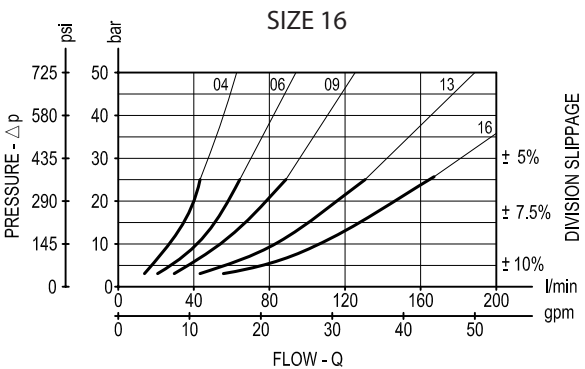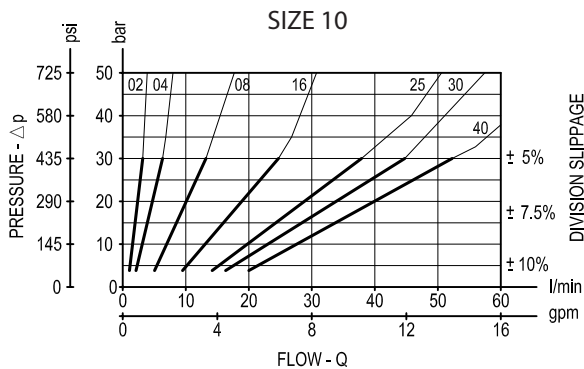

Ordering code

ON.07	K	00	Y	Z	W
-------	---	----	---	---	---

Manifold with flow divider

Cartridge style - Common cavity
(see table K on page 2)

Manifold material

= 00	Aluminium manifold
------	--------------------

= S0 Steel manifold

Settings - Range of rated total flow
(see table Z on page 2)

Manifold style - Dimensions and port sizes
(see table Y on page 1)

Preferred types (readily available)

[illegible][illegible]

Further types available by request