


HydraForce Launches New Bidirectional Double-Blocking Solenoid Valve SF08-28 for Low Leakage Load-Holding

HydraForce has launched a new bidirectional, double blocking solenoid valve rated for higher operating pressures up to 345 bar (5,000 psi).




SF08-28

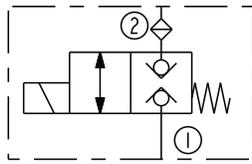

The SF08-28 is intended to be used as a virtual zero leakage directional valve (5 drops/min) for low flow applications, such as control of small cylinders in mobile equipment applications, including outriggers and sprayers.

When de-energized the SF08-28 blocks flow in both directions. When energized, the valve's poppet shifts to open the bidirectional flow path.

With a flow rate of up to 20 lpm (5 gpm), the SF08-28 can be specified for applications previously requiring the SV38-28, with the added advantages of the more compact, 08-size solenoid coil, and the 345 bar (5,000 psi) operating pressure for higher pressure hydraulics.

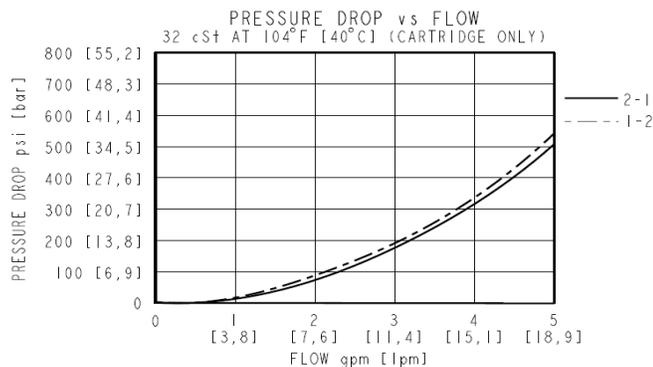

HydraForce's SF08-28 is available with a number of options that expand the valve's versatility, including an optional screen for the work port, and several choices of manual override options, T, P and K.

HydraForce has also redesigned the SV08-28, to replace the previous model of the same name.



A similar style of valve to the SF08-28, the SV08-28 solenoid valve is suitable for higher flow applications with lower operating pressures of 250 bar (3,625 psi).

COMPARISON TABLE

Valve Model	Flow Rating	Operating Pressure	Manual Overrides	Coil
NEW SF08-28	20 lpm (5 gpm)	345 bar (5,000 psi)	T, P, K	08 size E coil
NEW SV08-28	20 lpm (5 gpm)	250 bar (3,625 psi)	T, P, K	08 size E coil
OLD SV38-28	20 lpm (5 gpm)	207 bar (3,000 psi)	P, K	10 size E coil
OLD SV08-28	11 lpm (3 gpm)	207 bar (3,000 psi)	P, K	08 size E coil

For detailed information and specifications, visit www.hydraforce.com or contact your local HydraForce representative at www.hydraforce.com/distributors/world.htm

HYDRAFORCE INC

HYDRAFORCE HYDRAULICS LTD Advanced Manufacturing Hub

HYDRAFORCE HYDRAULICS SYSTEMS (CHANGZHOU) CO., LTD

HYDRAFORCE HYDRAULICS LTDA

500 Barclay Blvd.
Lincolnshire, IL 60069
Phone: +1 847 793 2300
Fax: +1 847 793 0086
Email: sales-us@hydraforce.com

250 Aston Hall Road
Birmingham B6 7FE United Kingdom
Phone: +44 121 333 1800
Fax: +44 121 333 1810
Email: sales-uk@hydraforce.com

388 W. Huanghe Road, Building 15A
GDH Changzhou Airport Indl Park
Xinbei District
Changzhou, China 213022
Phone: +86 519 6988 1200
Fax: +86 519 6988 1205
Email: Vincenz@hydraforce.com

Av. Laurita Ortega Mari,
499 Taboao da Serra
São Paulo, 06766-360 Brazil
Phone: +55 (11) 4786-4555
Fax: +55 (11) 4786-2050
Central@hydraulinc.com.br

Member: National Fluid Power Assoc.
ISO 9001

Member: British Fluid Power Association
and Verband Deutscher Maschinen-
und Anlagenbau e.V. (VDMA)
ISO 9001 & ISO 14001


ISO 9001

ISO 9001

Typical applications include reel mower lift arms; outriggers; attachments on construction equipment and forklifts; and in many applications where small power units are used.



Also available with optional manual override including options T, P and K; the newly designed SV08-28 reduces the number of components and cost, whilst simultaneously boosting valve performance in terms of pressure drop and actuator strength.


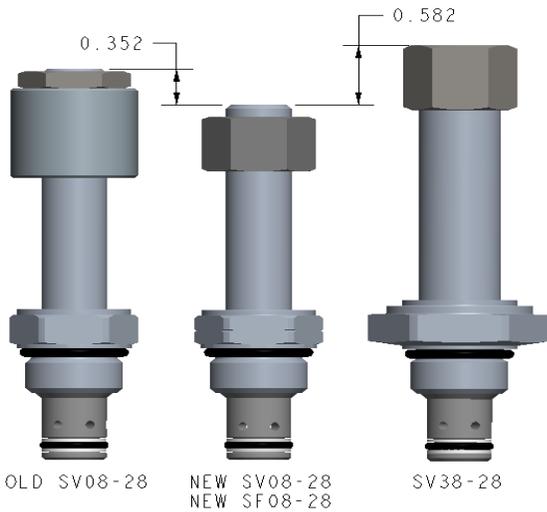


ABOVE: External side-by-side comparison of the former SV08-28 and SV38-28 models, against the new SF08-28

and newly redesigned SF08-28 valve.

Both valves are smaller and more compact than their predecessors, with the new SF08-28 being 0.582 inches shorter and the SV08-28 valve 0.35 inches shorter than the previous models SV08-28 and SV38-28.

The SF08-28 and redesigned SV08-28 both utilize a new actuator, resulting in a coil nut spacer no longer being required. The newly designed valves also have a decreased response time of over 50%, compared to previous models.

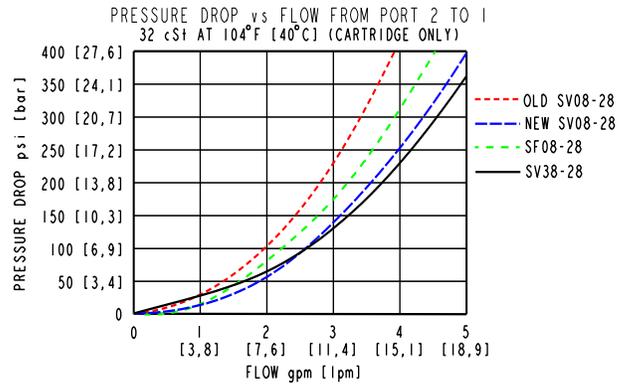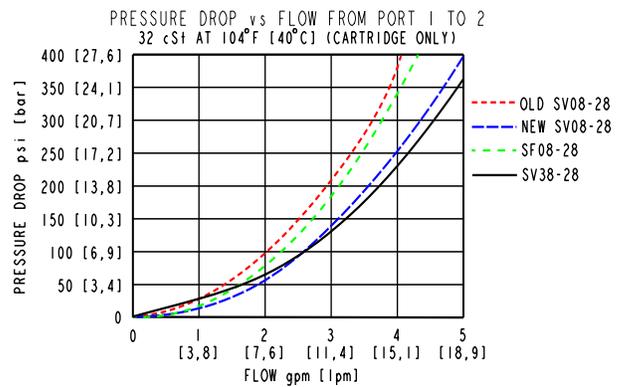

For more information on applying the SF08-28 and SV08-28 solenoid valves, please contact your HydraForce representative.

For detailed information and specifications, visit www.hydraforce.com or contact your local HydraForce representative at www.hydraforce.com/distributors/world.htm

HYDRAFORCE INC

HYDRAFORCE HYDRAULICS LTD
Advanced Manufacturing Hub

HYDRAFORCE HYDRAULICS SYSTEMS (CHANGZHOU) CO., LTD

HYDRAFORCE HYDRAULICS LTDA

500 Barclay Blvd.
Lincolnshire, IL 60069
Phone: +1 847 793 2300
Fax: +1 847 793 0086
Email: sales-us@hydraforce.com
Member: National Fluid Power Assoc.
ISO 9001

250 Aston Hall Road
Birmingham B6 7FE United Kingdom
Phone: +44 121 333 1800
Fax: +44 121 333 1810
Email: sales-uk@hydraforce.com
Member: British Fluid Power Association
and Verband Deutscher Maschinen-
und Anlagenbau e.V. (VDMA)
ISO 9001 & ISO 14001

388 W. Huanghe Road, Building 15A
GDH Changzhou Airport Indl Park
Xinbei District
Changzhou, China 213022
Phone: +86 519 6988 1200
Fax: +86 519 6988 1205
Email: Vincentz@hydraforce.com
ISO 9001

Av. Laurita Ortega Mari,
499 Taboao da Serra
São Paulo, 06766-360 Brazil
Phone: +55 (11) 4786-4555
Fax: +55 (11) 4786-2050
Central@hydraulinc.com.br
ISO 9001