




Overview

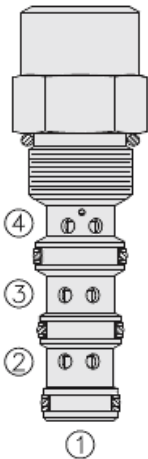

Description

EC10-42 is a screw-in, cartridge style, priority on demand pressure compensator valve with static load sense. Intended to provide priority flow in required amount, while allowing excessive flow to be used for auxiliary functions.


Operation

With inlet flow at port 3, the EC10-42 will deliver required priority flow at port 4 regardless of load pressure. Excessive flow exits at port 2 and port 1 is the load sense port. All ports may be fully pressurized.

Features

- Priority-on-demand.
- Static load sense.
- Hardened parts for long life.
- Quiet, modulated response.
- Industry-common cavity.

Symbol



Ratings

Pressure Ratings

Pressure rating	241 bar (3500 psi)
Proof pressure	345 bar (5000 psi)
Burst pressure	1034 bar (15000 psi)

Flow Ratings

Inlet flow rating	45 lpm (12.0 gpm)	- Note: Maximum
Priority flow rating	30 lpm (8.0 gpm)	- Note: With 5.5 bar (80 psi) compensating spring
	38 lpm (10.0 gpm)	- Note: With 10.3 bar (150 psi) compensating spring

Temperature Ratings

Operating fluid temperature	-40 to 100 °C (-40 to 212 °F)	- Note: With buna N seals
	-26 to 204 °C (-15 to 400 °F)	- Note: With fluorocarbon seals
	-54 to 107 °C (-65 to 225 °F)	- Note: With polyurethane seals
Storage temperature	-40 to 70 °C (-40 to 160 °F)	
Ambient temperature	-40 to 70 °C (-40 to 160 °F)	

Other Ratings

Corrosion protection	960 hr salt spray per ASTM b117 (model number - gec10-42)
----------------------	---

Operating Parameters


Fluids	Mineral based or synthetic hydraulic fluid with lubricating properties
Fluid viscosity range	7.4 to 420 cSt
Maximum operating contamination level	18/16/13 per ISO 4406

Properties


Unit weight	0.18 kg (0.40 lb)
Internal wetted surface area	172 cm ² (26.7 in ²)



Performance

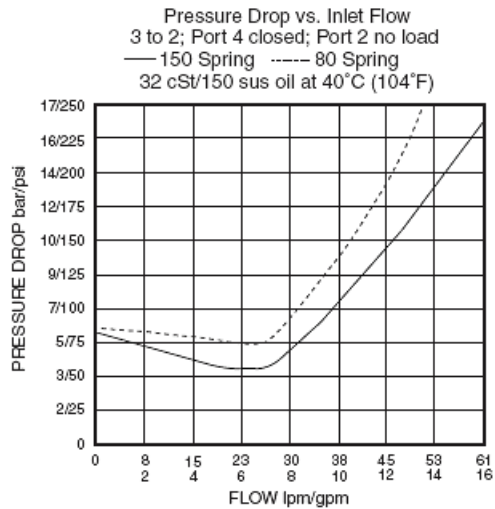

Dimensions

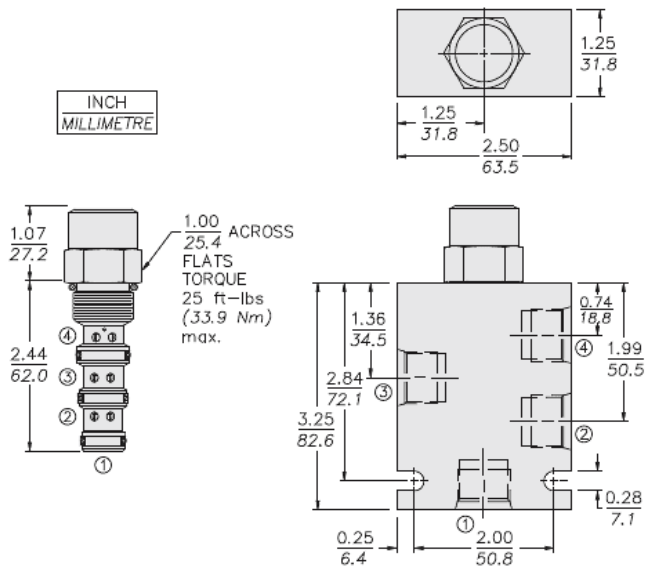

Installation Specifications


Cavity	VC10-4
Cartridge installation torque	33 to 35 N-m (24 to 26 ft-lb)
Maximum allowable torque	67.8 N-m (50 ft-lb)
Orientation restriction	None

Accessories

Seal kit	SK10-4X-MMM	- Note: X = seal option
Housings		



Order Code

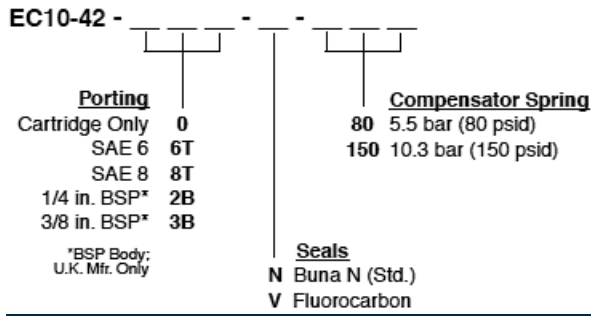

POSITION	CODE	DESCRIPTION
		EC10-42-H-J-R
H		Line Body
H	0	No Body
H	6T	Aluminum SAE 6
H	8T	Aluminum SAE 8
H	6TD	Ductile Iron SAE 6
J		Seal
J	N	Buna-N
J	V	Fluorocarbon
J	P	Polyurethane
J	U	PPDI Urethane
R		Compensator Spring
R	80	80 Compensator Spring
R	150	150 Compensator Spring