



## Overview



### Description

This is a direct-acting, spool-type, proportional, pressure reducing/relieving valve. It is a drop-in, flange mounted cartridge type valve. The coil is an integral part of the valve and is not serviceable. The regulated pressure is inversely proportional to the input electrical current.


### Operation

When no current is applied to the coil the valve allows free flow from 2 to 1 with the spring chamber constantly drained at port 3. Upon attainment of a predetermined pressure at port 1, the spool shifts to restrict inlet flow from port 2, thereby regulating the pressure at port 1. In this mode the valve will also relieve port 1 to port 3. Increasing current to the coil will decrease the control pressure at port 1 proportionally.

### Features

- Economical drop-in style
- Mounting plate option
- Several regulated pressure ranges
- Quick response time
- Screen option
- Top-mounted connector
- Low leakage

### Symbol



## Ratings

### Pressure Ratings

Pressure rating	44.8 bar (650 psi)	- <b>Note:</b> Port 1 and 2
	34.5 bar (500 psi)	- <b>Note:</b> Port 3
Proof pressure	207 bar (3000 psi)	- <b>Note:</b> Ports 1, 2
	54 bar (780 psi)	- <b>Note:</b> Port 3
Burst pressure	250 bar (3625 psi)	- <b>Note:</b> All ports pressurized
Control pressure at zero control current	31.3 ±4 bar (454 ±59 psi)	

### Flow Ratings

Flow rating	11.4 lpm (3.0 gpm)	
Maximum internal leakage	230 ml/min (14.0 in <sup>3</sup> /min)	- <b>Note:</b> De-energized at 44.8 bar (650 psi)
	150 ml/min (9.2 in <sup>3</sup> /min)	- <b>Note:</b> Energized at 44.8 bar (650 psi)

### Other Ratings

Cycle life	10 million cycles
Environmental rating	IP69K
Corrosion protection	960 hour salt spray per ASTM B117

### Temperature Ratings

Operating fluid temperature	-40 to 149 °C (-40 to 300 °F)	- <b>Note:</b> HNBR
	-26 to 204 °C (-15 to 400 °F)	- <b>Note:</b> Fluorocarbon
Storage temperature	-40 to 70 °C (-40 to 158 °F)	
Ambient temperature	-40 to 100 °C (-40 to 212 °F)	

## Operating Parameters

Fluids	Mineral based or synthetic hydraulic fluid with lubricating properties
Fluid viscosity range	7.4 to 420 cSt



Properties


Unit weight	0.27 kg (0.59 lb)
Internal wetted surface area	156 cm <sup>2</sup> (24.2 in <sup>2</sup> )

Electrical Parameters


Maximum control current	1.34 A	- Note: S12 coil
	0.67 A	- Note: S24 coil
Hysteresis	Less than 5 %	- Note: At 100 Hz PWM, after 360 mA (S12 coil)/180 mA (S24 coil)
Coil resistance	4.83 Ω	- Note: S12 coil
	18.35 Ω	- Note: S24 coil

Performance


PRESSURE DROP VS FLOW CHARACTERISTIC  
2 TO 1 (DE-ENERGIZED)  
(CARTRIDGE ONLY)

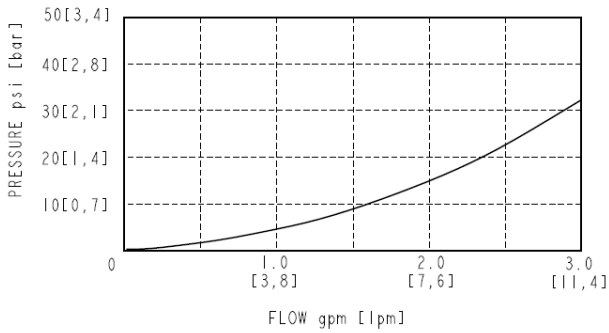

GENERAL TEST CONDITIONS  
(UNLESS OTHERWISE SPECIFIED)  
OIL: MOBIL DTE @ 104°F [40°C], 32 cSt.

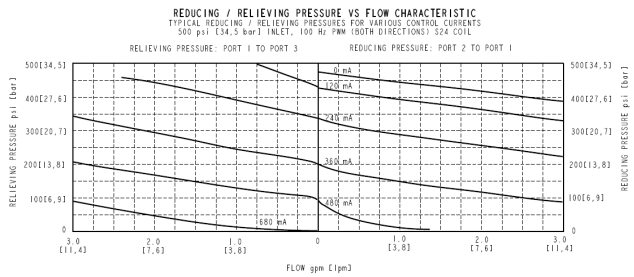


REDUCING PRESSURE VS CURRENT CHARACTERISTIC  
REGULATED PRESSURE PORT 1 - 100 Hz PWM (S24 COIL)  
EHPR98-G37C

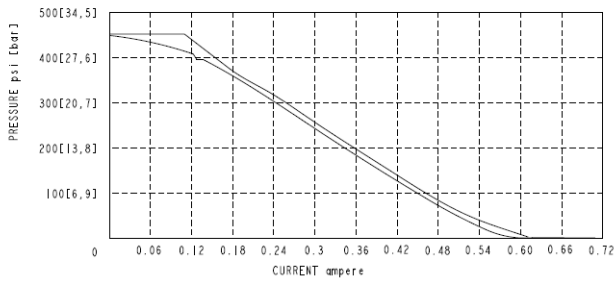



## Dimensions

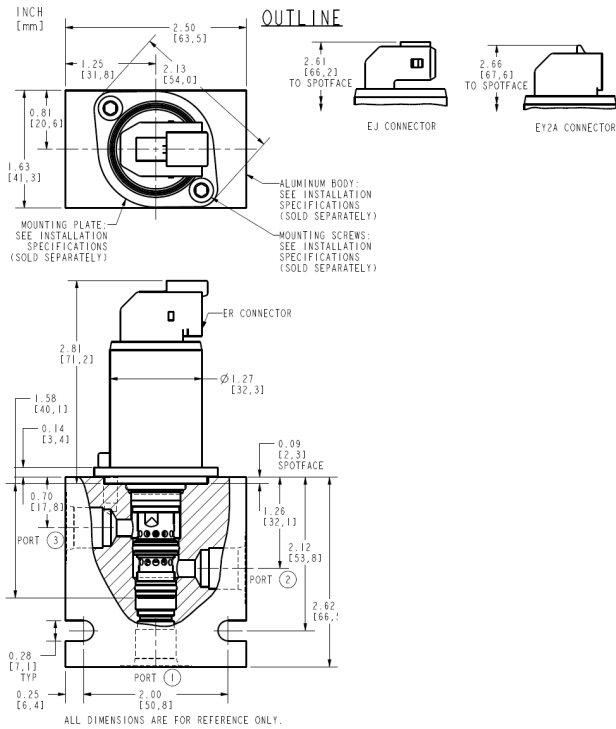

## Installation Specifications

Cavity	VC-G028
Installation type	Flange mounted
Orientation restriction	None
Mounting screw torque	3 to 4 N-m (2.2 to 3.0 ft-lb)

## Accessories


Mounting plate	HF P/N 4595096	- <b>Note:</b> Sold separately
Mounting screw	M5 x 0.8 x 12 mm long, HF P/N: 4002609	- <b>Note:</b> Sold separately
Seal kit	SK-G028-X	- <b>Note:</b> X=seal option
Ported test body	HF P/N: 71612X0	- <b>Note:</b> Sold separately

## Order Code



**ORDERING INFORMATION**

**EHP98-G37XXX-0-X-XXXX**

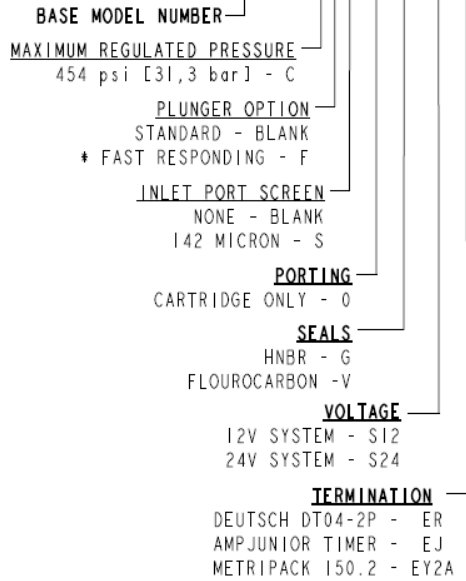

\* THE FAST RESPONDING PLUNGER IS TYPICALLY USED IN PILOT APPLICATIONS WITH INCREASED VOLUME AT THE CONTROL PORT. MINIMUM VOLUME AT THE CONTROL PORT MAY CAUSE THE VALVE TO BECOME UNSTABLE. CONSULT FACTORY FOR APPLICATION ASSISTANCE WHEN SELECTING THIS OPITON.

POSITION	CODE	DESCRIPTION
		EHP98-G37DFG-H-J-KL-U
D		Max Regulated Pressure
D	C	31.3 bar (454 psi)
F		Plunger Option
F	BLANK	Standard Version
F	F	Fast Responding
G		Screen
G	BLANK	NONE
G	S	100 Mesh Screen
H		Line Body
H	0	No Body
J		Seal
J	G	HNBR (Hydrogenated Nitrile Butadiene Rubber)
J	V	Fluorocarbon
J	P	Polyurethane
K		Coil Voltage
K	10	10 VDC
K	12	12 VDC
K	14	14 VDC
K	20	20 VDC
K	24	24 VDC
K	28	28 VDC
L		Coil Termination
L	EJ	E-Coil, AMP Jr.
L	ER	E-Coil, Deutsch



POSITION	CODE	DESCRIPTION
L	EY2A	E-Coil, Metri-Pack 150.2