

## Overview

### Description

Magnet wire wound on a molded 30% glass filled bobbin framed in steel and encapsulated with 30% glass filled polyester resin. Coil impregnated with anerobic sealant.

## Ratings


### Properties

Magnet wire	U.S. class H 180 °C (356) minimum rating
Mating connector	DT06-2S-P012 - <b>Note:</b> DEUTSCH DT04-2P DELPHI/PACKARD number 12010973 - <b>Note:</b> Weather-Pack 2 terminal male, lead wires 18 AWG

### Electrical Parameters

Coil resistance	4.65 to 5.15 ohm - <b>Note:</b> At 20 °C (68 °F), 12 Vdc coil 18.34 to 19.80 ohm - <b>Note:</b> At 20 °C (68 °F), 24 Vdc coil
Maximum control current	1.5 A - <b>Note:</b> 12 Vdc coil 0.75 A - <b>Note:</b> 24 Vdc coil
Coil initial power consumption	11 W - <b>Note:</b> At maximum control current, 12 V coil 10.8 W - <b>Note:</b> At maximum control current, 24 V coil

## Dimensions

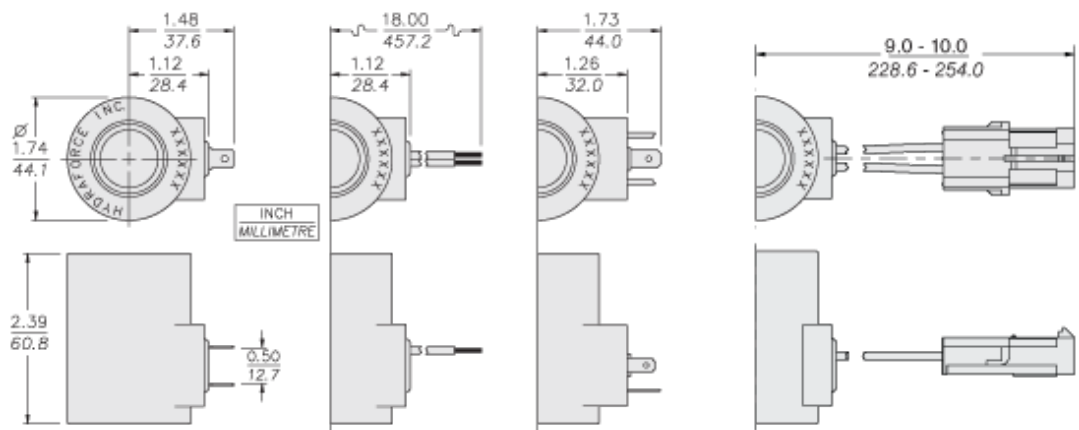

## Coil Part Numbers